



A D T

# CE EMC TEST REPORT

**REPORT NO.:** CE120601D14

**MODEL NO.:** IP8372

**RECEIVED:** Jun. 1, 2012

**TESTED:** Jun. 1 ~ Aug. 9, 2012

**ISSUED:** Sep. 3, 2012

**APPLICANT:** VIVOTEK INC.

**ADDRESS:** 6F, No.192, Lien-Cheng Rd., Chung-Ho ,  
New Taipei City, 235, Taiwan, R.O.C.

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB LOCATION:** No. 47, 14th Ling, Chia Pau Vil., Lin Kou  
Dist., New Taipei City, Taiwan ( R.O.C. )

This report should not be used by the client to claim product certification, approval, or endorsement by TAF, NVLAP, NIST or any government agencies.



LAB CODE: 200836-0



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



## Table of Contents

RELEASE CONTROL RECORD.....	4
1 CERTIFICATION .....	5
2 SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY .....	8
3 GENERAL INFORMATION .....	9
3.1 GENERAL DESCRIPTION OF EUT.....	9
3.2 DESCRIPTION OF TEST MODES.....	10
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	11
3.4 DESCRIPTION OF SUPPORT UNITS.....	12
3.4.1 FOR EMISSION TEST .....	12
3.4.2 FOR IMMUNITY TEST .....	13
4 EMISSION TEST.....	15
4.1 CONDUCTED EMISSION MEASUREMENT .....	15
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	15
4.1.2 TEST INSTRUMENTS .....	16
4.1.3 TEST PROCEDURE .....	17
4.1.4 DEVIATION FROM TEST STANDARD .....	17
4.1.5 TEST SETUP .....	17
4.1.6 EUT OPERATING CONDITIONS.....	18
4.1.7 TEST RESULTS.....	19
4.2 CONDUCTED EMISSION MEASUREMENT AT TELECOMMUNICATION PORTS.....	21
4.2.1 LIMIT OF CONDUCTED COMMON MODE DISTURBANCE AT TELECOMMUNICATION PORTS .....	21
4.2.2 TEST INSTRUMENTS .....	22
4.2.3 TEST PROCEDURE .....	23
4.2.4 DEVIATION FROM TEST STANDARD .....	24
4.2.5 TEST SETUP .....	25
4.2.6 EUT OPERATING CONDITIONS.....	26
4.2.7 TEST RESULTS.....	27
4.3 RADIATED EMISSION MEASUREMENT .....	29
4.3.1 LIMITS OF RADIATED EMISSION MEASUREMENT.....	29
4.3.2 TEST INSTRUMENTS .....	30
4.3.3 TEST PROCEDURE .....	31
4.3.4 DEVIATION FROM TEST STANDARD .....	31
4.3.5 TEST SETUP .....	32
4.3.6 EUT OPERATING CONDITIONS.....	32
4.3.7 TEST RESULTS.....	33
5 IMMUNITY TEST .....	37
5.1 GENERAL DESCRIPTION.....	37
5.2 GENERAL PERFORMANCE CRITERIA DESCRIPTION.....	38
5.3 EUT OPERATING CONDITION .....	39
5.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD).....	40
5.4.1 TEST SPECIFICATION.....	40
5.4.2 TEST INSTRUMENTS .....	40
5.4.3 TEST PROCEDURE .....	41



5.4.4	DEVIATION FROM TEST STANDARD .....	42
5.4.5	TEST SETUP .....	43
5.4.6	TEST RESULTS.....	44
5.5	RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS).....	45
5.5.1	TEST SPECIFICATION.....	45
5.5.2	TEST INSTRUMENTS .....	46
5.5.3	TEST PROCEDURE .....	47
5.5.4	DEVIATION FROM TEST STANDARD .....	47
5.5.5	TEST SETUP .....	47
5.5.6	TEST RESULTS.....	48
5.6	ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT) .....	49
5.6.1	TEST SPECIFICATION.....	49
5.6.2	TEST INSTRUMENTS .....	49
5.6.3	TEST PROCEDURE .....	50
5.6.4	DEVIATION FROM TEST STANDARD .....	50
5.6.5	TEST SETUP .....	51
5.6.6	TEST RESULTS.....	52
5.7	SURGE IMMUNITY TEST .....	53
5.7.1	TEST SPECIFICATION.....	53
5.7.2	TEST INSTRUMENTS .....	53
5.7.3	TEST PROCEDURE .....	54
5.7.4	DEVIATION FROM TEST STANDARD .....	54
5.7.5	TEST SETUP .....	54
5.7.6	TEST RESULTS.....	55
5.8	IMMUNITY TO CONDUCTED DISTURBANCES INDUCED BY RF FIELDS (CS).....	56
5.8.1	TEST SPECIFICATION.....	56
5.8.2	TEST INSTRUMENTS .....	57
5.8.3	TEST PROCEDURE .....	58
5.8.4	DEVIATION FROM TEST STANDARD .....	58
5.8.5	TEST SETUP .....	59
5.8.6	TEST RESULTS.....	60
5.9	POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST.....	61
5.9.1	TEST SPECIFICATION.....	61
5.9.2	TEST INSTRUMENTS .....	61
5.9.3	TEST PROCEDURE .....	62
5.9.4	DEVIATION FROM TEST STANDARD .....	62
5.9.5	TEST SETUP .....	62
5.9.6	TEST RESULTS.....	63
6	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	64
7	APPENDIX - INFORMATION ON THE TESTING LABORATORIES.....	79



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
CE120601D14	Original release	Sep. 3, 2012



# 1 CERTIFICATION

**PRODUCT:** Network Camera  
**BRAND NAME:** VIVOTEK  
**MODEL NO.:** IP8372  
**TEST ITEM:** ENGINEERING SAMPLE  
**APPLICANT:** VIVOTEK INC.  
**TESTED:** Jun. 1 ~ Aug. 9, 2012  
**STANDARDS:** **EN 55022:2010, Class A**

**EN 55024:2010**

IEC 61000-4-2:2008	ED.2.0
IEC 61000-4-3:2010	ED.3.2
IEC 61000-4-4:2012	ED.3.0
IEC 61000-4-5:2005	ED.2.0
IEC 61000-4-6:2008	ED.3.0
IEC 61000-4-8:2009	ED.2.0
IEC 61000-4-11:2004	ED.2.0 (Not Applicable)

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Jessica Cheng , **DATE:** Sep. 3, 2012  
( Jessica Cheng / Specialist )

**APPROVED BY :** Kenny Meng , **DATE:** Sep. 3, 2012  
( Kenny Meng / Assistant Manager )

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

EMISSION			
Standard	Test Type	Result	Remarks
EN 55022:2010, Class A	Conducted Test	PASS	Meets Class A Limit Minimum passing margin is -13.67 dB at 11.89444MHz
	Conducted Test (telecom port)	PASS	Meets Class A Limit Minimum passing margin is -10.51 dB at 10.00000 MHz
	Radiated Test (30MHz ~ 2GHz)	PASS	Meets Class A Limit Minimum passing margin is -6.21 dB at 215.99 MHz

**Note:** The EUT highest frequency generated **486MHz** and therefore the test frequency range was performed up to 2GHz for radiated emission test.



A D T

<b>IMMUNITY (EN 55024:2010)</b>			
<b>Standard</b>	<b>Test Type</b>	<b>Result</b>	<b>Remarks</b>
IEC 61000-4-2:2008 ED.2.0	Electrostatic discharge immunity test	PASS	Meets the requirements of Performance Criterion B
IEC 61000-4-3:2010 ED.3.2	Radiated, radio-frequency, electromagnetic field immunity test	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-4:2011 ED.2.1	Electrical fast transient / burst immunity test.	PASS	Meets the requirements of Performance Criterion B
IEC 61000-4-5:2005 ED.2.0	Surge immunity test	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-6:2008 ED.3.0	Immunity to conducted disturbances, induced by radio-frequency fields	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-8:2009 ED.2.0	Power frequency magnetic field immunity test.	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-11:2004 ED.2.0	Voltage dips and short interruptions immunity tests	N/A	Refer to item 3.3

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz ~ 30MHz	2.41 dB
Conducted emissions at telecom port	150kHz ~ 30MHz	2.7683 dB
Radiated emissions	30MHz~1GHz	3.76 dB
	Above 1GHz	3.36 dB

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Network Camera
<b>MODEL NO.</b>	IP8372
<b>POWER SUPPLY</b>	AC adapter (AC 24V) or DC Adapter (DC 12V) or POE (DC 48V)
<b>DATA CABLE SUPPLIED</b>	N/A

**NOTE:**

1. The EUT is a Network Camera.
2. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

1. The EUT consumes power from the following support units, which were provide by client:

Item	Brand	Model No.	Specification
POE	NETGEAR	NU60-F480125-I1	AC I/P: 100-240V, 50/60Hz, 1.4A DC O/P: 48.0V, 1.25A
AC adapter	ENG	1009X	AC I/P: 230V, 50Hz, 900mA AC O/P: 24V, 600mA
DC adapter	ENG	3A-183WP12	AC I/P: 100-240V, 50Hz, 0.6A DC O/P: 12V, 1.5A

2. During the test, the EUT was pre-tested under following conditions:

Pre-test Mode	Support unit	Input Power
Mode 1	AC adapter	AC 24V
Mode 2	DC adapter	DC 12V
Mode 3	POE	POE 48Vdc

3. The worst emission level was found under **Mode 1** and therefore the EUT was tested under the following mode:

Test Item	Test Mode
Conducted, Conducted Test at Telecom Port, Radiated emission and	Mode 1
Immunity Tests	Mode 1

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of ITE equipment and, according to the specifications of the manufacturers, must comply with the requirements of the following standards:

**EN 55022:2010, Class A**

**EN 55024:2010**

IEC 61000-4-2: 2008 ED.2.0

IEC 61000-4-3:2010 ED.3.2

IEC 61000-4-4:2012 ED.3.0

IEC 61000-4-5: 2005 ED.2.0

IEC 61000-4-6: 2008 ED.3.0

IEC 61000-4-8: 2009 ED.2.0

The EUT doesn't connect directly to AC mains lines or EUT consumes DC power and therefore, the standard, **IEC 61000-4-11**, was not performed for the test.

**Notes:** The above IEC basic standards are applied with latest version if customer has no special requirement



### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


#### 3.4.1 FOR EMISSION TEST

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP27L	9SNZ12S	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m UTP LAN cable.

**NOTE:** All power cords of the above support units are non shielded (1.8m).

#### TEST CONFIGURATION

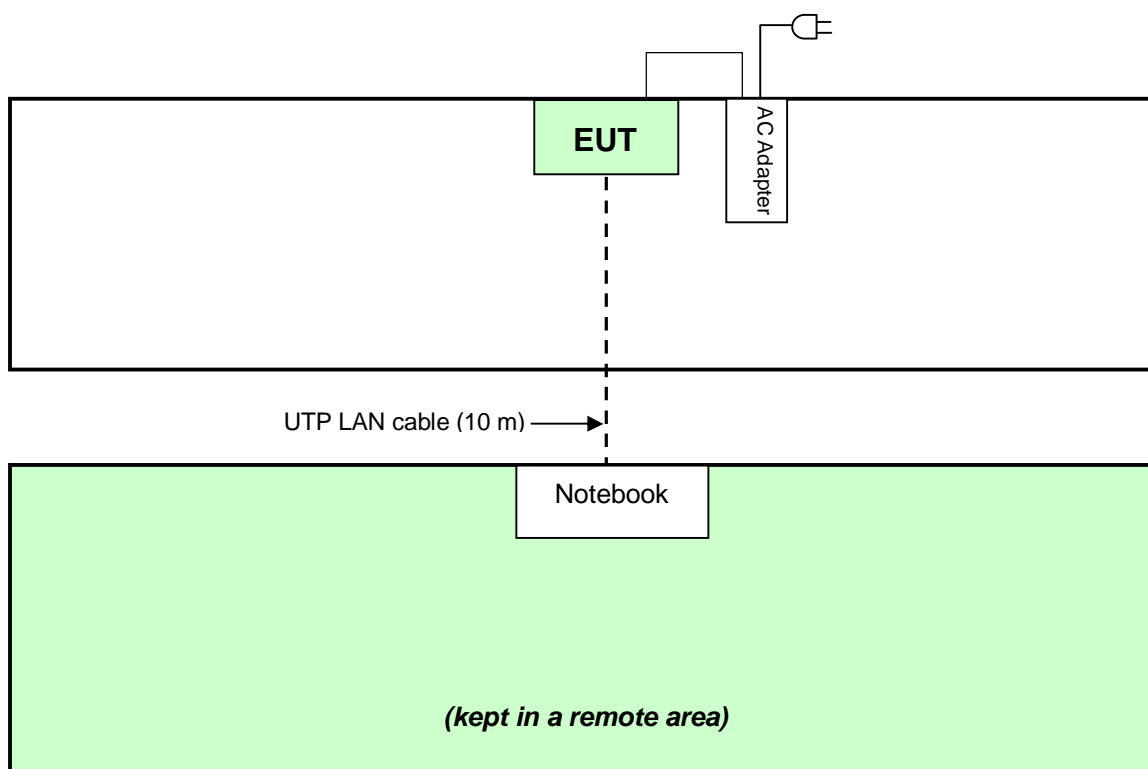




### 3.4.2 FOR IMMUNITY TEST

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Monitor	SONY	LDL-15G2000	N/A	N/A
2	SPEAKER	KINYO	KSP-25	N/A	N/A
3	MIC.	Logitech	LOG038	N/A	N/A
4	NOTEBOOK COMPUTER	DELL	PP04X	66SYW1S	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.8 m BNC cable.
2	1.2 m wrapped shielded wire, terminated with 3.5mm phone plug via drain wire, w/o core.
3	2.4 m wrapped shielded wire, terminated via drain wire, with 3.5 mm phone plug, w/o core.
4	10m UTP LAN cable.

**NOTE:** All power cords of the above support units are non shielded (1.8m).

### TEST CONFIGURATION

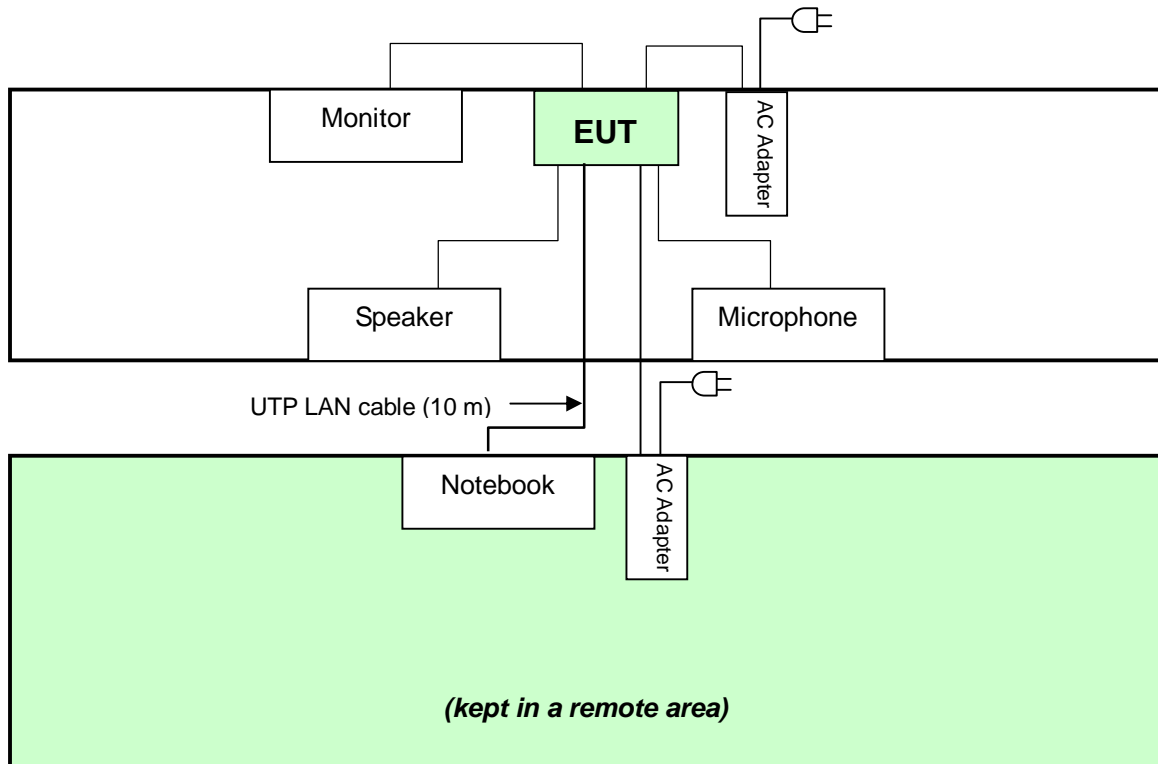

## 4 EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD: EN 55022

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTE:**
- (1) The lower limit shall apply at the transition frequencies.
  - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



## 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100276	Jan. 04, 2012	Jan. 03, 2013
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100219	Nov. 24, 2011	Nov. 23, 2012
LISN With Adapter (for EUT)	AD10	C10Ada-001	Nov. 24, 2011	Nov. 23, 2012
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100218	Dec. 08, 2011	Dec. 07, 2012
Software	ADT_Cond_V7.3.7	NA	NA	NA
Software	ADT_ISN_V7.3.7	NA	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	Feb. 20, 2012	Feb. 19, 2013
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Feb. 22, 2012	Feb. 21, 2013

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in Shielded Room No. 10.
  3. The VCCI Site Registration No. C-1852.
  4. Tested Date: Jun. 4, 2012.




### 4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.1.5 TEST SETUP

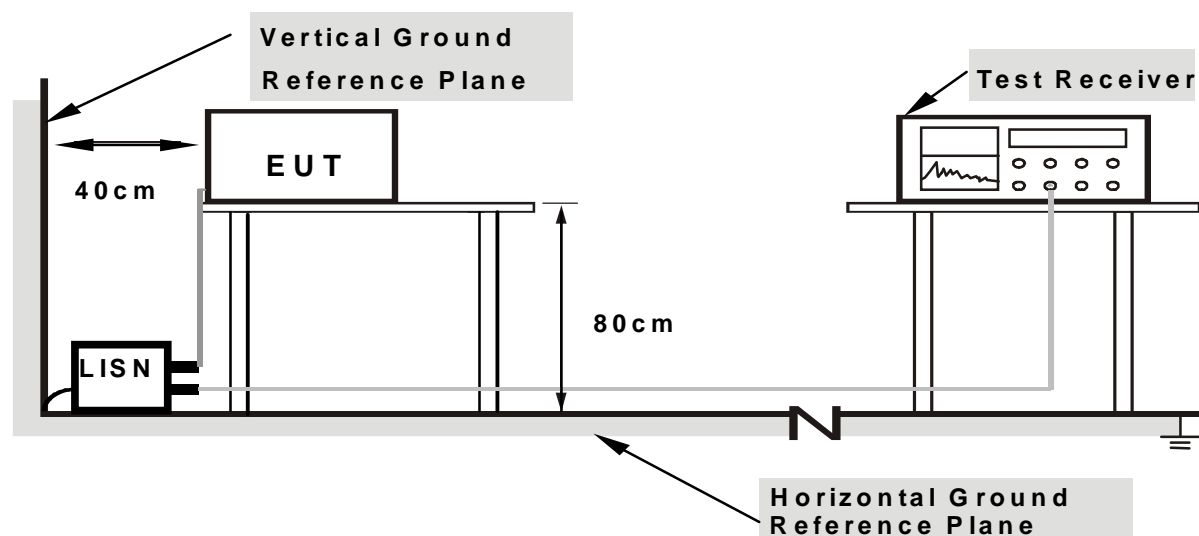

**Note: 1.Support units were connected to second LISN .**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



#### **4.1.6 EUT OPERATING CONDITIONS**

- a. Connected the EUT with AC adapter placed on testing table.
- b. Turned on the power of all equipment.
- c. EUT captured video signal.
- d. EUT sent and received messages from/to Notebook (kept in a remote area) via an UTP LAN cable (10 m).
- e. Steps c-e were repeated.



A D T


### 4.1.7 TEST RESULTS

<b>TEST MODE</b>	Mode 1	<b>6DB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (AC TO AC ADAPTER)</b>	AC 24V	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 79% RH	<b>TESTED BY:</b> Dalen Dai	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.24747	0.16	47.98	22.92	48.14	23.08	79.00	66.00	-30.86	-42.92
2	2.08594	0.30	38.20	25.07	38.50	25.37	73.00	60.00	-34.50	-34.63
3	5.23758	0.48	26.30	23.20	26.78	23.68	73.00	60.00	-46.22	-36.32
4	11.89453	0.83	49.45	44.46	50.28	45.29	73.00	60.00	-22.72	-14.71
5	18.19531	1.18	44.88	42.06	46.06	43.24	73.00	60.00	-26.94	-16.76
6	23.12891	1.35	44.94	40.00	46.29	41.35	73.00	60.00	-26.71	-18.65

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

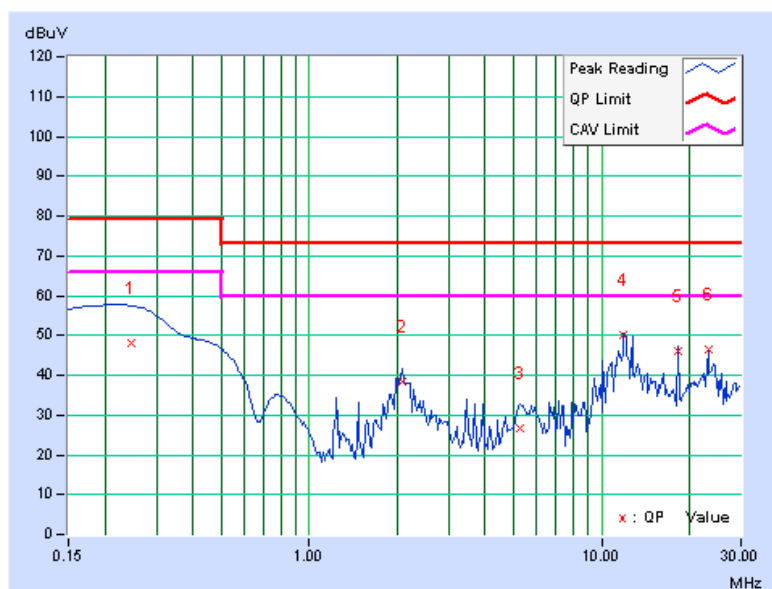




A D T

<b>TEST MODE</b>	Mode 1	<b>6DB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (AC TO AC ADAPTER)</b>	AC 24V	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 79% RH	<b>TESTED BY:</b> Dalen Dai	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.24668	0.16	47.10	22.54	47.26	22.70	79.00	66.00	-31.74	-43.30
2	2.07813	0.28	38.58	24.31	38.86	24.59	73.00	60.00	-34.14	-35.41
3	6.70177	0.49	30.44	25.41	30.93	25.90	73.00	60.00	-42.07	-34.10
4	9.93878	0.61	44.94	38.82	45.55	39.43	73.00	60.00	-27.45	-20.57
<b>5</b>	<b>11.89444</b>	<b>0.68</b>	<b>49.77</b>	<b>45.65</b>	<b>50.45</b>	<b>46.33</b>	<b>73.00</b>	<b>60.00</b>	<b>-22.55</b>	<b>-13.67</b>
6	23.12891	0.97	44.30	39.54	45.27	40.51	73.00	60.00	-27.73	-19.49

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

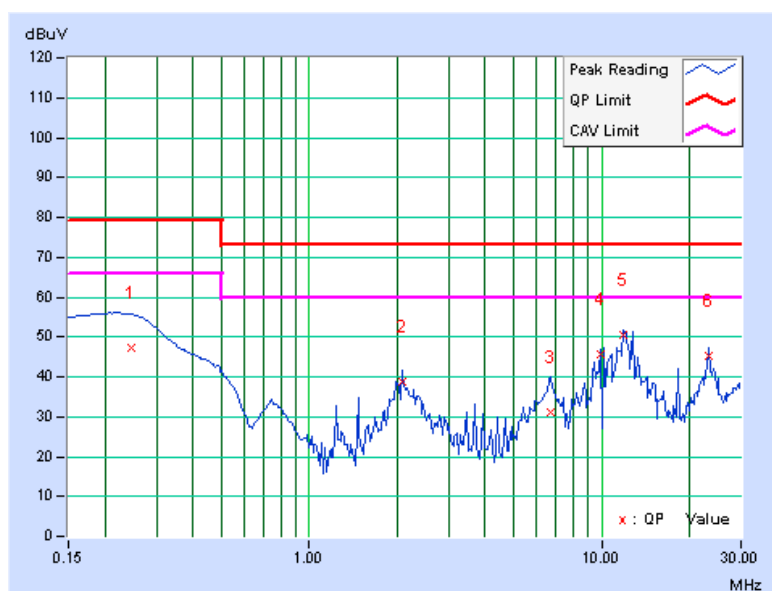

## 4.2 CONDUCTED EMISSION MEASUREMENT AT TELECOMMUNICATION PORTS

### 4.2.1 LIMIT OF CONDUCTED COMMON MODE DISTURBANCE AT TELECOMMUNICATION PORTS

#### TEST STANDARD: EN 55022 FOR CLASS A EQUIPMENT

FREQUENCY (MHz)	Voltage Limit (dBuV)		Current Limit (dBuA)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	97 – 87	84 - 74	53 – 43	40 – 30
0.5 - 30.0	87	74	43	30

#### FOR CLASS B EQUIPMENT

FREQUENCY (MHz)	Voltage Limit (dBuV)		Current Limit (dBuA)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	84 - 74	74 - 64	40 – 30	30 – 20
0.5 - 30.0	74	64	30	20

**NOTE:** (1) The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.



A D T

## 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100276	Jan. 04, 2012	Jan. 03, 2013
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100219	Nov. 24, 2011	Nov. 23, 2012
LISN With Adapter (for EUT)	AD10	C10Ada-001	Nov. 24, 2011	Nov. 23, 2012
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100218	Dec. 08, 2011	Dec. 07, 2012
Software	ADT_Cond_V7.3.7	NA	NA	NA
Software	ADT_ISN_V7.3.7	NA	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	Feb. 20, 2012	Feb. 19, 2013
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Feb. 22, 2012	Feb. 21, 2013
FCC ISN	F-071115-1057-1	20652	Jan. 20, 2012	Jan. 19, 2013
RF Current Probe	F-33-4	56	Jul. 19, 2011	Jul. 18, 2012
EM Injection Clamp	FCC-203I	50	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in Shielded Room No. 10.
  3. The VCCI Site Registration No. T-1611.
  4. Tested Date: Jun. 4, 2012.

### 4.2.3 TEST PROCEDURE

#### For using ISN:

- a. The EUT is placed 0.4 meters from the conducting wall of the shielded room and connected to ISN directly to reference ground plane.
- b. If voltage measurement is used, measure voltage at the measurement port of the ISN, correct the reading by adding the ISN voltage division factor, and compare to the voltage limit.
- c. If current measurement is used, measure current with the current probe and compare to the current limit.
- d. It is not necessary to apply the voltage and the current limit if the ISN is used. A  $50\ \Omega$  load has to be connected to the measurement port of the ISN during the current measurement.
- e. The disturbance levels and the frequencies of at least six highest disturbances are recorded from be measured each telecommunication port, which comprises the EUT.

#### For using a 150 W load to the outside surface of the shield cable:

- a. Break the insulation and connect a  $150\ \Omega$  resistor from the outside surface of the shield cable to ground, and apply a ferrite tube or clamp between  $150\ \Omega$  connection and AE.
- b. The EUT is placed 0.4 meters from the conducting wall of the shielded room and connected to AE with the shield cable.
- c. Measure current with a current probe and compare to the current limit. The common mode impedance towards the right of the  $150\ \Omega$  resistor.
- d. The disturbance levels and the frequencies of at least six highest disturbances are recorded from be measured each telecommunication port, which comprises the EUT.

**For using a combination of current probe and capacitive voltage probe:**

- a. The EUT is placed 0.4 meters from the conducting wall of the shielded room and connected to AE with a cable. The cable contains more than four balanced pairs or to unbalanced cable.
- b. Measure current with a current probe and compare to the current limit.
- c. Measure voltage with a capacitive probe and adjust the measured voltage as follows:
  - current margin  $\leq 6$  dB – subtract the actual current margin from measured voltage;
  - current margin  $> 6$  dB – subtract 6 dB from measured voltage.Compare adjusted voltage with the applicable voltage limit.
- d. Both the measured current and the adjusted voltage shall be below the applicable current and voltage limits.
- e. The disturbance levels and the frequencies of at least six highest disturbances are recorded from be measured each telecommunication port, which comprises the EUT.


#### **4.2.4 DEVIATION FROM TEST STANDARD**

No deviation



## 4.2.5 TEST SETUP


### For using ISN:

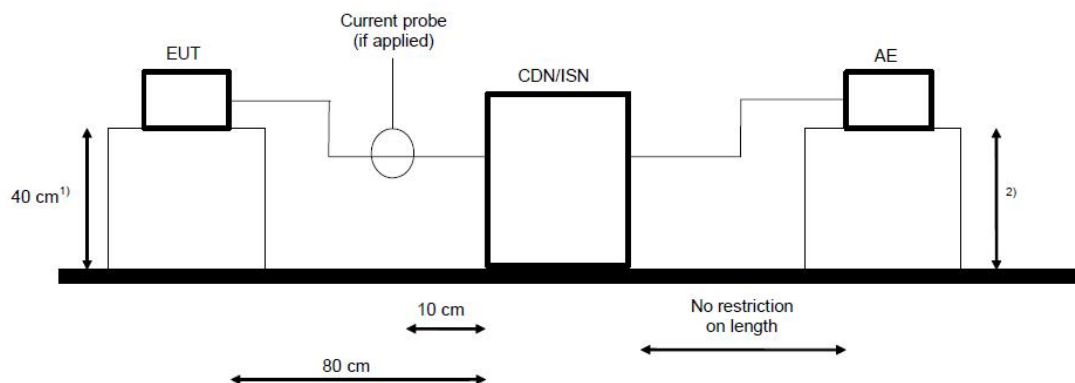

AE = Associated equipment  
EUT = Equipment under test

- 1) Distance to the reference groundplane (vertical or horizontal).
- 2) Distance to the reference groundplane is not critical.


### For using a 150 W load to the outside surface of the shield cable:

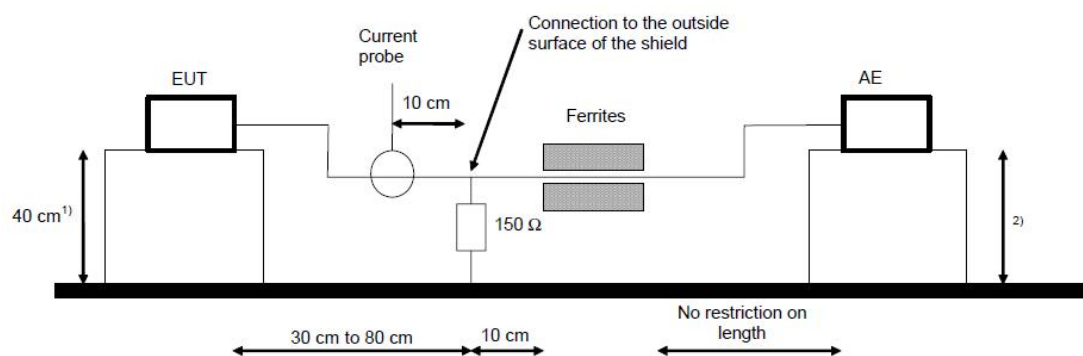

AE = Associated equipment  
EUT = Equipment under test

- 1) Distance to the reference groundplane (vertical or horizontal).
- 2) Distance to the reference groundplane is not critical.

**For using a combination of current probe and capacitive voltage probe:**

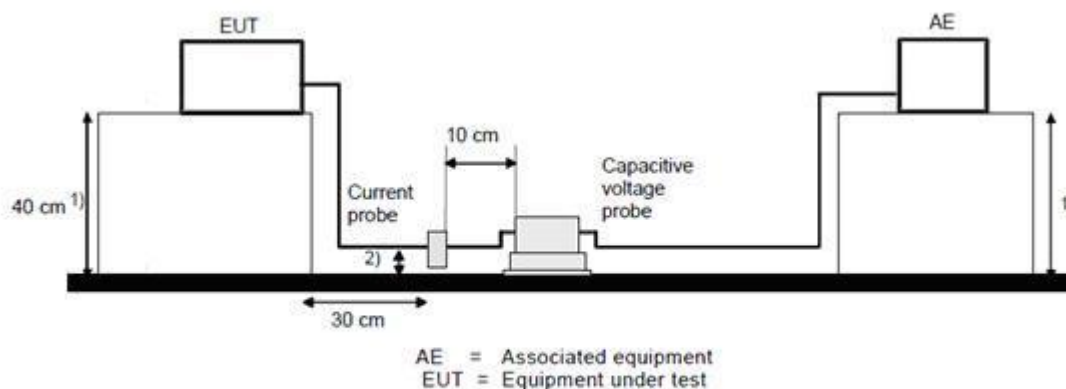

- 1) Distance to the reference groundplane (vertical or horizontal)
- 2) Distance  $4 \pm 1$  cm from the reference groundplane.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

- a. Connected the EUT with AC adapter placed on testing table.
- b. Turned on the power of all equipment.
- c. EUT captured video signal.
- d. Notebook (kept in a remote area) run “TfGen.exe” (286kB, 10% of transmission rate 10/100Mbps) then sent and received messages to/ from EUT via an UTP LAN cable (10m).
- e. Steps c-e were repeated.



A D T


## 4.2.7 TEST RESULTS

<b>TEST MODE</b>	Mode 1	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (AC TO AC ADAPTER)</b>	AC 24V	<b>PHASE</b>	RJ45 TELECOM PORT (10Mbps)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 79% RH	<b>TESTED BY:</b> Dalen Dai	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	A.V.	Q.P.	A.V.
1	0.24675	9.68	47.22	32.41	56.90	42.09	92.87	79.87	-35.97	-37.78
2	1.47649	9.34	48.14	42.52	57.48	51.86	87.00	74.00	-29.52	-22.14
3	3.69013	9.32	44.34	38.12	53.66	47.44	87.00	74.00	-33.34	-26.56
4	4.91797	9.31	41.77	34.41	51.08	43.72	87.00	74.00	-35.92	-30.28
<b>5</b>	<b>10.00000</b>	<b>9.46</b>	<b>67.03</b>	<b>48.08</b>	<b>76.49</b>	<b>57.54</b>	<b>87.00</b>	<b>74.00</b>	<b>-10.51</b>	<b>-16.46</b>
6	12.89453	9.59	44.25	37.75	53.84	47.34	87.00	74.00	-33.16	-26.66

### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

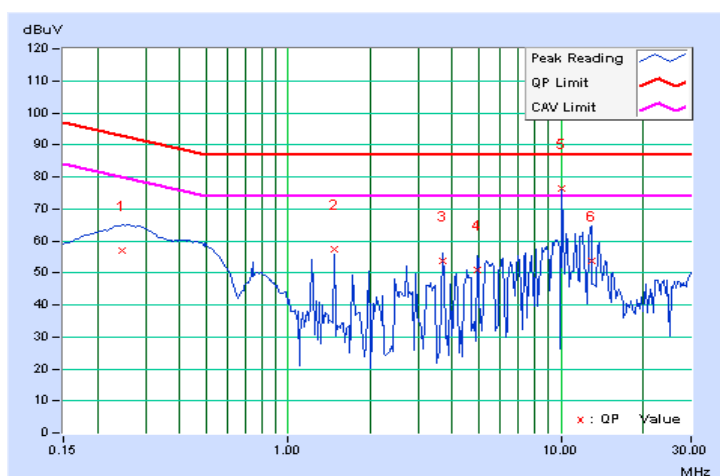




A D T

<b>TEST MODE</b>	Mode 1	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (AC TO AC ADAPTER)</b>	AC 24V	<b>PHASE</b>	RJ45 TELECOM PORT (100Mbps)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 79% RH	<b>TESTED BY:</b> Dalen Dai	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	A.V.	Q.P.	A.V.
1	0.24687	9.68	47.17	32.56	56.85	42.24	92.86	79.86	-36.01	-37.62
2	1.47656	9.34	47.81	42.10	57.15	51.44	87.00	74.00	-29.85	-22.56
3	3.68878	9.32	43.66	37.29	52.98	46.61	87.00	74.00	-34.02	-27.39
4	5.90742	9.34	42.09	37.68	51.43	47.02	87.00	74.00	-35.57	-26.98
5	10.06250	9.46	44.92	41.43	54.38	50.89	87.00	74.00	-32.62	-23.11
6	12.80859	9.59	52.18	47.54	61.77	57.13	87.00	74.00	-25.23	-16.87

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

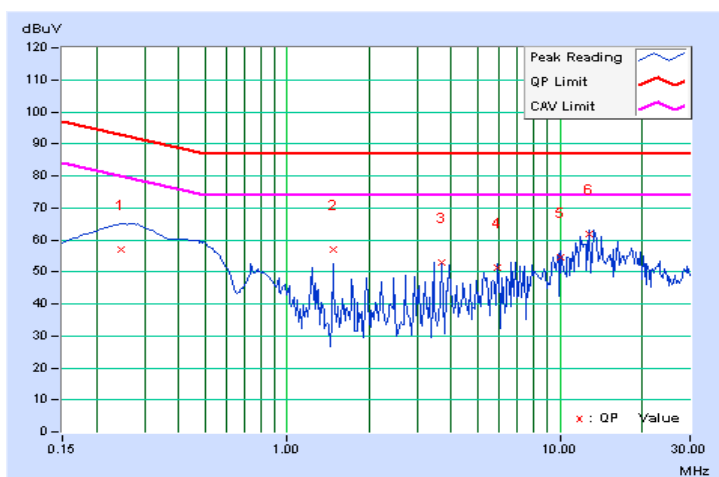

## 4.3 RADIATED EMISSION MEASUREMENT

### 4.3.1 LIMITS OF RADIATED EMISSION MEASUREMENT

#### TEST STANDARD: EN 55022 FOR FREQUENCY BELOW 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 – 1000	47	37

#### FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (GHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
1 to 3	76	56	70	50
3 to 6	80	60	74	54

- NOTE:** (1) The lower limit shall apply at the transition frequencies.  
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement Range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	Up to 5 times of the highest frequency or 6 GHz, whichever is less



A D T

### 4.3.2 TEST INSTRUMENTS

#### Frequency Range 30MHz~1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ TEST RECEIVER	ESVS 30	841977/008	Apr. 26, 2012	Apr. 25, 2013
SCHAFFNER BILOG Antenna	CBL6111C	2793	Apr. 03, 2012	Apr. 02, 2013
ADT. Turn Table	TT100	0201	NA	NA
ADT. Tower	AT100	0201	NA	NA
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
ADT RF Switches BOX	EM-H-01-1	1004	Dec. 16, 2011	Dec. 15, 2012
WOKEN RF cable	8D	CABLE-ST10-01	Dec. 16, 2011	Dec. 15, 2012

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in Open Site No. 10.
  3. The VCCI Site Registration No. R-1625.
  4. The Industry Canada Reference No. IC 7450E-10.
  5. The FCC Site Registration No. 698148.
  6. Tested Date: Jun. 1, 2012.

#### Frequency Range above 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum	E4446A	MY46180403	Jun. 22, 2011	Jun. 21, 2012
Agilent Preamplifier	8449B	3008A01201	Feb. 29, 2012	Feb. 28, 2013
MITEQ Preamplifier	AMF-6F-2604 00-33-8P	892164	Mar. 02, 2012	Mar. 01, 2013
Schwarzbeck Horn Antenna	BBHA-9170	BBHA9170190	Oct. 07, 2011	Oct. 06, 2012
Schwarzbeck Horn Antenna	BBHA-9120-D1	D130	May 18, 2012	May 17, 2013
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
SUHNER RF cable	SF102	Cable-CH6	Aug. 19, 2011	Aug. 18, 2012

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in Chamber No. 6.
  3. The Industry Canada Reference No. IC 7450E-6.
  4. The VCCI Site Registration No. G-257
  5. The FCC Site Registration No. 447212.
  6. The minimum 3dB beamwidth of antenna is 30 degrees for above 1GHz test.
  7. Tested Date: Jun. 4, 2012.

### 4.3.3 TEST PROCEDURE

#### <Frequency Range 30MHz ~ 1GHz >

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

**NOTE:** The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.

#### <Frequency Range above 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

**NOTE:**


1. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
2. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.

### 4.3.4 DEVIATION FROM TEST STANDARD


No deviation

### 4.3.5 TEST SETUP

<Frequency Range 30MHz ~ 1GHz >

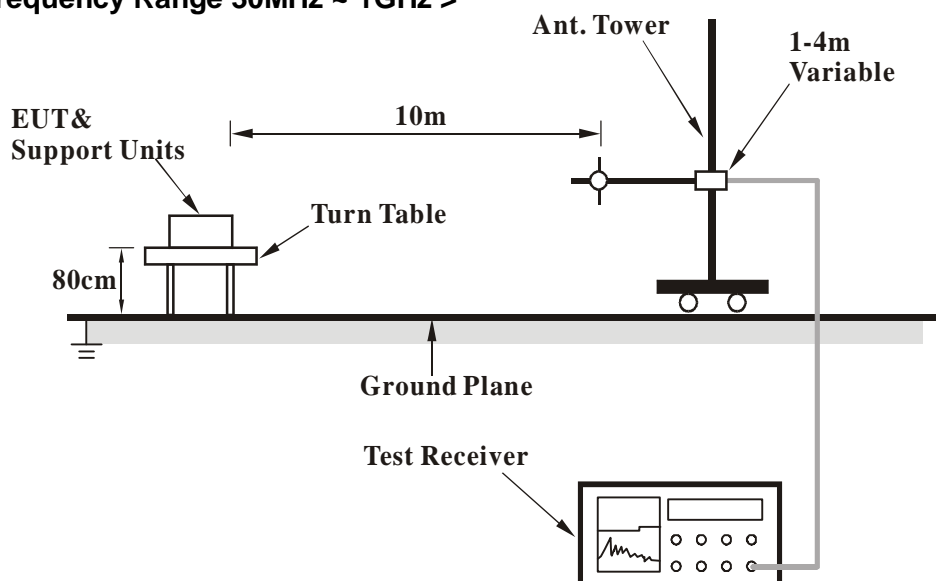

<Frequency Range above 1GHz>

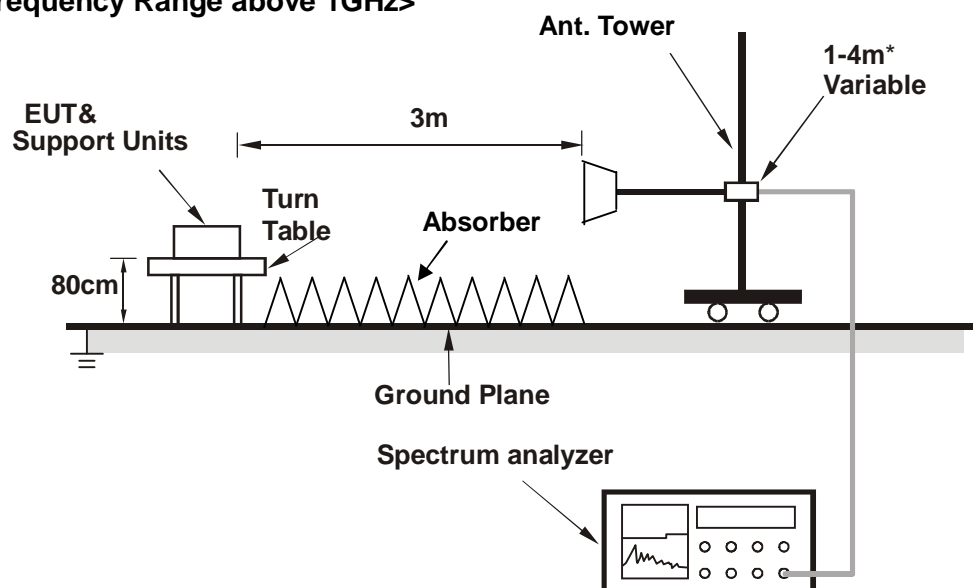

\* : depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 4.3.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.






### 4.3.7 TEST RESULTS

<b>TEST MODE</b>	Mode 1	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (AC TO AC ADAPTER)</b>	AC 24V	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120 kHz
<b>ENVIRONMENTAL CONDITIONS</b>	27deg. C, 79% RH	<b>TESTED BY:</b> Kobe Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	61.52	25.72 QP	40.00	-14.28	4.00 H	14	18.23	7.49
2	125.32	28.00 QP	40.00	-12.00	4.00 H	255	14.75	13.25
3	131.12	24.43 QP	40.00	-15.57	4.00 H	86	11.08	13.35
4	175.37	25.68 QP	40.00	-14.32	4.00 H	7	14.22	11.46
5	216.25	27.69 QP	40.00	-12.31	4.00 H	265	14.80	12.89
6	245.31	33.48 QP	47.00	-13.52	4.00 H	20	18.37	15.11
7	360.37	35.39 QP	47.00	-11.61	4.00 H	0	16.50	18.89
8	454.85	34.01 QP	47.00	-12.99	2.34 H	158	12.57	21.44
9	811.32	33.78 QP	47.00	-13.22	1.00 H	38	5.53	28.25

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

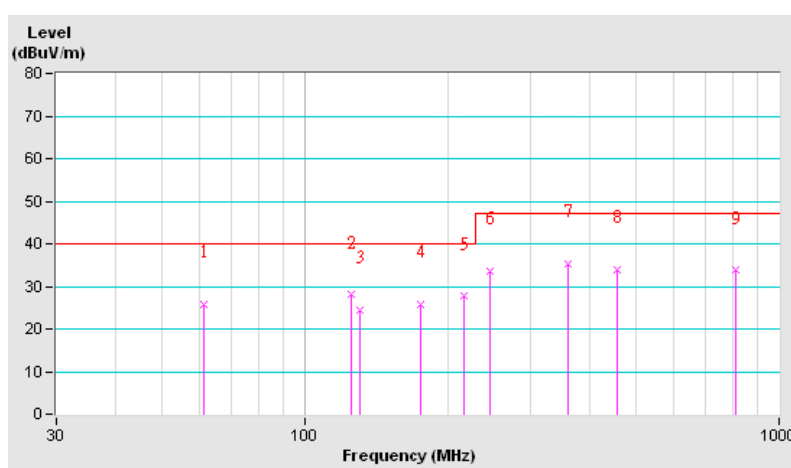



A D T


<b>TEST MODE</b>	Mode 1	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (AC TO AC ADAPTER)</b>	AC 24V	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120 kHz
<b>ENVIRONMENTAL CONDITIONS</b>	27deg. C, 79% RH	<b>TESTED BY:</b> Kobe Lu	

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.35	25.14 QP	40.00	-14.86	1.00 V	249	17.60	7.54
2	125.04	25.25 QP	40.00	-14.75	1.00 V	89	12.01	13.25
3	167.99	23.42 QP	40.00	-16.58	1.00 V	232	11.49	11.93
<b>4</b>	<b>215.99</b>	<b>33.79 QP</b>	<b>40.00</b>	<b>-6.21</b>	<b>1.00 V</b>	<b>298</b>	<b>20.92</b>	<b>12.87</b>
5	252.17	37.91 QP	47.00	-9.09	1.00 V	180	22.38	15.53
6	288.14	39.12 QP	47.00	-7.88	1.00 V	222	22.53	16.59
7	360.01	38.42 QP	47.00	-8.58	1.00 V	117	19.54	18.88
8	396.25	37.96 QP	47.00	-9.04	1.00 V	69	17.97	19.99
9	769.32	37.78 QP	47.00	-9.22	3.07 V	233	10.37	27.41

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

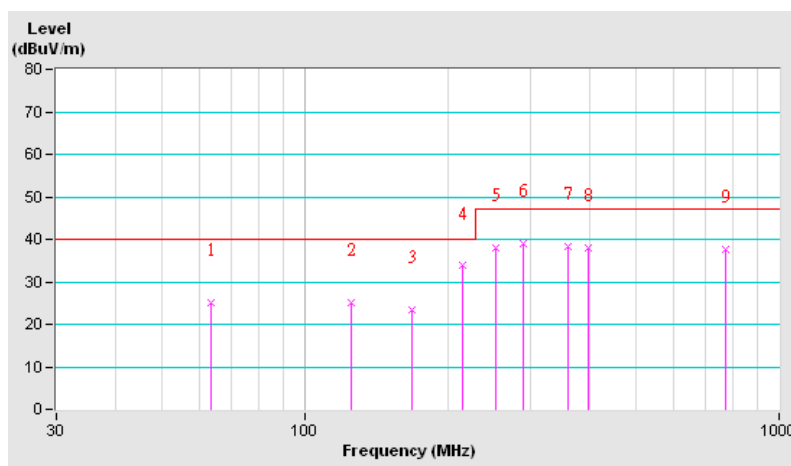



A D T


<b>TEST MODE</b>	Mode 1	<b>FREQUENCY RANGE</b>	1-2GHz
<b>INPUT POWER (AC TO AC ADAPTER)</b>	AC 24V	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak/ Average, 1MHz
<b>ENVIRONMENTAL CONDITIONS</b>	27deg. C, 79% RH	<b>TESTED BY:</b> Kent Wang	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1226.68	45.96 PK	76.00	-30.04	1.00 H	321	19.34	26.62
2	1226.68	38.96 AV	56.00	-17.04	1.00 H	321	12.34	26.62
3	1749.99	45.63 PK	76.00	-30.37	1.47 H	222	17.44	28.19
4	1749.99	39.12 AV	56.00	-16.88	1.47 H	222	10.93	28.19
5	1928.85	43.79 PK	76.00	-32.21	1.38 H	185	15.32	28.47
6	1928.85	38.89 AV	56.00	-17.11	1.38 H	185	10.42	28.47

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

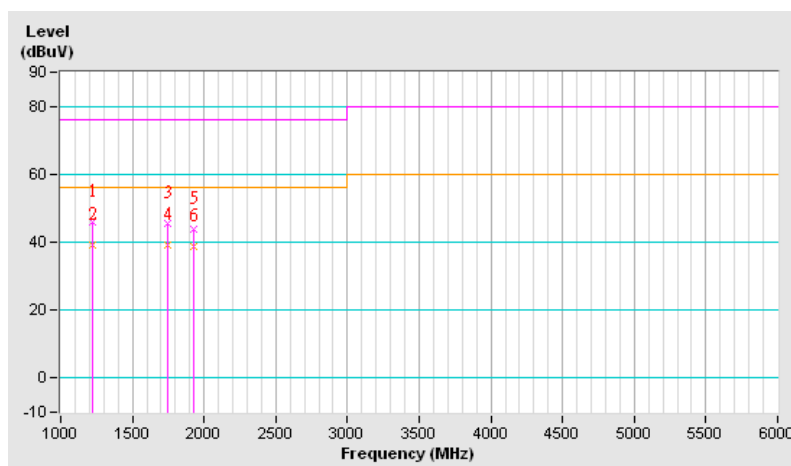


<b>TEST MODE</b>	Mode 1	<b>FREQUENCY RANGE</b>	1-2GHz
<b>INPUT POWER (AC TO AC ADAPTER)</b>	AC 24V	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak/ Average, 1MHz
<b>ENVIRONMENTAL CONDITIONS</b>	27deg. C, 79% RH	<b>TESTED BY:</b> Kent Wang	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1375.12	46.66 PK	76.00	-29.34	1.50 V	196	19.49	27.17
2	1375.12	38.02 AV	56.00	-17.98	1.50 V	196	10.85	27.17
3	1409.96	43.98 PK	76.00	-32.02	1.00 V	233	16.70	27.28
4	1409.96	38.07 AV	56.00	-17.93	1.00 V	233	10.79	27.28
5	1645.96	46.98 PK	76.00	-29.02	1.36 V	345	19.02	27.96
6	1645.96	38.88 AV	56.00	-17.12	1.36 V	345	10.92	27.96

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

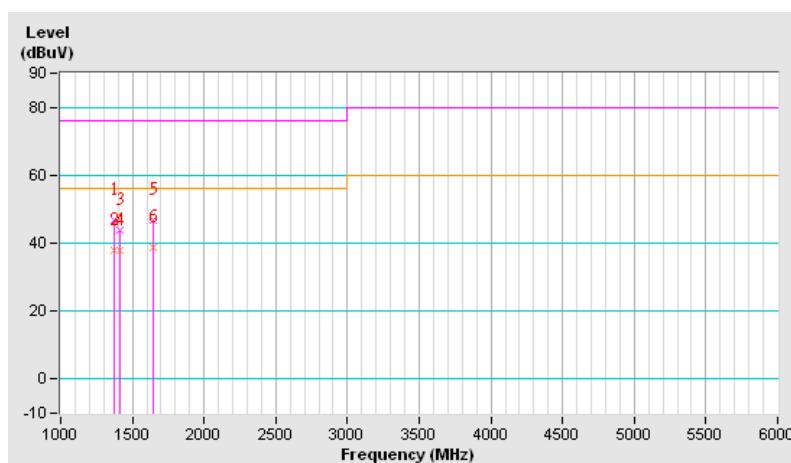



## 5.2 GENERAL PERFORMANCE CRITERIA DESCRIPTION

According to Clause 7 of EN 55024 standard, the following describes.

### General performance criteria

<b>CRITERION A</b>	The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
<b>CRITERION B</b>	After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomenon below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state if stored data is allowed to persist after the test. If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
<b>CRITERION C</b>	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

### Particular performance criteria

The particular performance criteria which are specified in the normative annexes of EN 55024 take precedence over the corresponding parts of the general performance criteria.

Where particular performance criteria for specific functions are not given, then the general performance criteria shall apply.

### 5.3 EUT OPERATING CONDITION

- a. Connected the EUT with AC adapter.
- b. Turned on the power of all equipment.
- c. EUT captured video signal.
- d. EUT sent video signal to LCD monitor then its displayed video signal on its screen.
- e. EUT sent and received messages from/to Server PC (kept in a remote area) via an UTP LAN cable (10 m).
- f. EUT sent 1kHz audio signal to speaker.
- g. Steps c-g were repeated.

## 5.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

### 5.4.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-2
<b>Discharge Impedance:</b>	330 ohm / 150 pF
<b>Discharge Voltage:</b>	Air Discharge : 2 kV/ 4 kV /8 kV (Direct) Contact Discharge : 2 kV/ 4 kV (Direct / Indirect)
<b>Polarity:</b>	Positive & Negative
<b>Number of Discharge:</b>	Air Discharge: min. 20 times at each test point Contact Discharge: min. 200 times in total
<b>Discharge Mode:</b>	Single Discharge
<b>Discharge Period:</b>	1 second minimum

### 5.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
KeyTek, ESD Simulator	MZ-15/EC	0504259	Jul. 05, 2012	Jul. 04, 2013

- NOTE:**
1. The test was performed in ESD Room No. 3.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: Aug. 9, 2012.



### 5.4.3 TEST PROCEDURE

The discharges shall be applied in two ways:

a. Contact discharges to the conductive surfaces and coupling planes:

The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the horizontal coupling plane. The remaining three test points shall each receive at least 50 direct contact discharges. If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.

b. Air discharges at slots and apertures and insulating surfaces:

On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.


The basic test procedure was in accordance with IEC 61000-4-2:

- a. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- b. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- c. The time interval between two successive single discharges was at least 1 second.
- d. The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- e. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- f. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- g. At least ten single discharges (in the most sensitive polarity) were applied to the **Horizontal Coupling Plane** at points on each side of the EUT. The ESD generator was positioned horizontally at a distance of 0.1 meters from the EUT with the discharge electrode touching the **HCP**.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

#### 5.4.4 DEVIATION FROM TEST STANDARD

No deviation

## 5.4.5 TEST SETUP

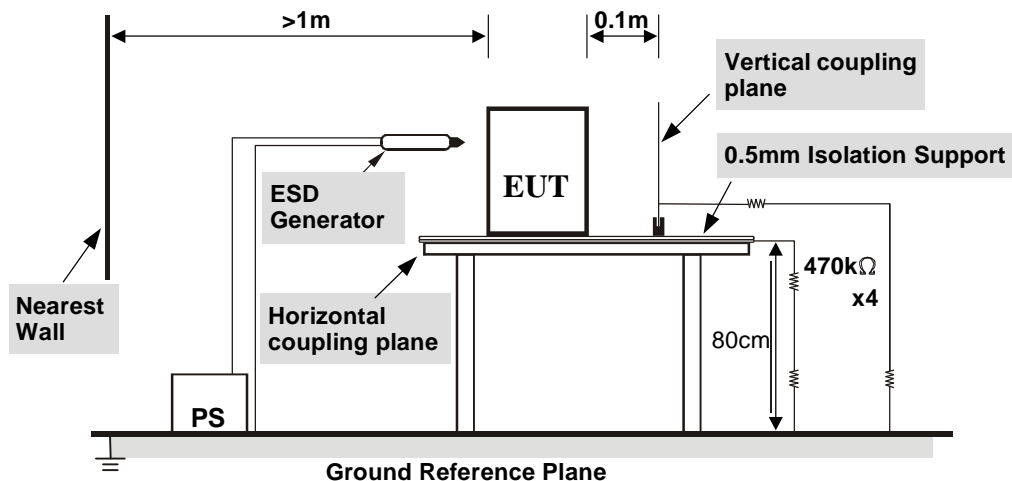

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### NOTE:

#### TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940kΩ total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

#### FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

## 5.4.6 TEST RESULTS

<b>TEST MODE</b>	Mode 1	<b>INPUT POWER</b>	230Vac, 50 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	27deg. C, 50% RH, 991hPa	<b>TESTED BY</b>	Aga Lin

TEST RESULTS OF DIRECT APPLICATION					
Discharge Level (kV)	Polarity	Test Point	Contact Discharge	Air Discharge	Performance Criterion
2	+/-	1, 4	Note(1)	N/A	A
4	+/-	1, 4	Note(2)(3)	N/A	B
2, 4, 8	+/-	3, 5, 6	N/A	Note(1)	A
2, 4	+/-	2	N/A	Note(1)	A
8	+/-	2	N/A	Note(2)(3)	B

**Description of test point:** Please refer to ESD test photo for representative marks only.

TEST RESULTS OF INDIRECT APPLICATION					
Discharge Level (kV)	Polarity	Test Point	Horizontal Coupling Plane	Vertical Coupling Plane	Performance Criterion
2, 4	+/-	1 ~ 4	Note(1)	Note(1)	A

**Description of test point:**

1. Left side
2. Right side
3. Front side
4. Rear side

- NOTE:** (1) There was no change compared with initial operation during the test.
- (2) There was flickered disturbance on the screen during the test, but self-recoverable after the test.
- (3) The transmission of data from LAN port was disconnected 3~9 seconds during the test, but self-recoverable after the test.

## 5.5 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

### 5.5.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-3
<b>Frequency Range:</b>	80 MHz - 1000 MHz
<b>Field Strength:</b>	3 V/m
<b>Modulation:</b>	1 kHz Sine Wave, 80%, AM Modulation
<b>Frequency Step:</b>	1 % of fundamental
<b>Polarity of Antenna:</b>	Horizontal and Vertical
<b>Antenna Height:</b>	1.5 m
<b>Dwell Time:</b>	3 seconds



## 5.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Signal Generator	E8257D	MY48050465	Jul. 11, 2012	Jul. 10, 2013
PRANA RF Amplifier	AP32DP280	0811-894	NA	NA
AR RF Amplifier	150W1000M3	306601	NA	NA
AR RF Amplifier	35S4G8AM4	0326094	NA	NA
AR RF Amplifier	100S1G4M3	0329249	NA	NA
AR Controller	SC1000M3	305910	NA	NA
Radisense Electric Field Sensor	CTR1001A	06D00232SNO-02	Jul. 15, 2012	Jul. 14, 2013
Radisense Electric Field Sensor	CTR1002A	08D00057SNO-07	Jun. 06, 2012	Jun. 05, 2013
BOONTON RF Voltage Meter	4232A	10180	Jun. 14, 2012	Jun. 13, 2013
BOONTON Power Sensor	51011-EMC	34152	Jun. 14, 2012	Jun. 13, 2013
BOONTON Power Sensor	51011-EMC	34153	Jun. 14, 2012	Jun. 13, 2013
AR Log-Periodic Antenna	AT6080	0329465	NA	NA
EMCO BiconiLog Antenna	3141	1001	NA	NA
AR High Gain Antenna	AT4002A	306533	NA	NA
AR High Gain Horn Antenna	AT4010	0329800	NA	NA
CHANCE MOST Full Anechoic Chamber (9x5x3m)	Chance Most	RS-002	Feb. 10, 2012	Feb. 09, 2013
Software	ADT_RS_V7.6	NA	NA	NA

- NOTE:** 1. The test was performed in RS Room No.2.  
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
3. The transmit antenna was located at a distance of 3 meters from the EUT.  
4. Tested Date: Aug. 8, 2012.

### 5.5.3 TEST PROCEDURE


The test procedure was in accordance with IEC 61000-4-3

- a. The testing was performed in a fully-anechoic chamber.
- b. The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80% amplitude modulated with a 1kHz sine wave.
- c. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to respond, but shall in no case be less than 0,5s.
- d. The field strength level was 3V/m.
- e. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

### 5.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.5.5 TEST SETUP

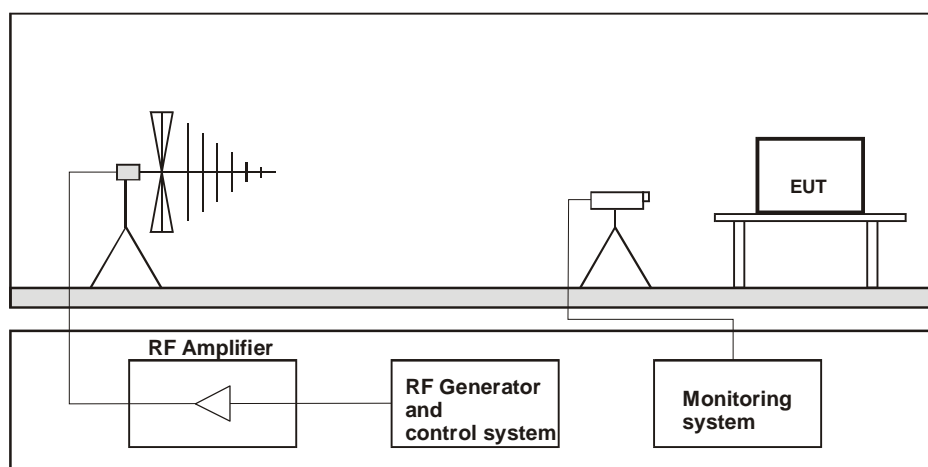

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### NOTE:

##### TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

##### FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.



A D T

### 5.5.6 TEST RESULTS

<b>TEST MODE</b>	Mode 1	<b>INPUT POWER (AC TO AC ADAPTER)</b>	AC 24V
<b>ENVIRONMENTAL CONDITIONS</b>	28deg. C, 66% RH	<b>TESTED BY</b>	Aga Lin

Frequency (MHz)	Polarity	Azimuth	Field Strength (V/m)	Obser- vation	Performance Criterion
80 - 1000	V&H	0	3	Note	A
80 - 1000	V&H	90	3		
80 - 1000	V&H	180	3		
80 - 1000	V&H	270	3		

**NOTE:** There was no change compared with initial operation during the test.



## 5.6 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)

### 5.6.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-4
<b>Test Voltage:</b>	Power Line : 1kV Signal/Control Line : 0.5kV (Cat.5 Line)
<b>Polarity:</b>	Positive & Negative
<b>Impulse Frequency:</b>	100 kHz: only for signal lines of xDSL equipment 5 kHz: except for xDSL equipment
<b>Impulse Waveshape:</b>	5/50 ns
<b>Burst Duration:</b>	15 ms
<b>Burst Period:</b>	300 ms
<b>Test Duration:</b>	1 min.

### 5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Haefely, EFT Generator	PEFT 4010	154954	Apr. 26, 2012	Apr. 25, 2013
Haefely,Capacitive Clamp	IP4A	155173	NA	NA

- NOTE:**
1. The test was performed in EFT Room
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: Aug. 8, 2012.


### 5.6.3 TEST PROCEDURE

- a. Both positive and negative polarity discharges were applied.
- b. The length of the “hot wire” from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 0.5meter  $\pm$  0.05meter.
- c. The duration time of each test sequential was 1 minute.
- d. The transient/burst waveform was in accordance with IEC 61000-4-4, 5/50ns.

### 5.6.4 DEVIATION FROM TEST STANDARD

No deviation.

## 5.6.5 TEST SETUP

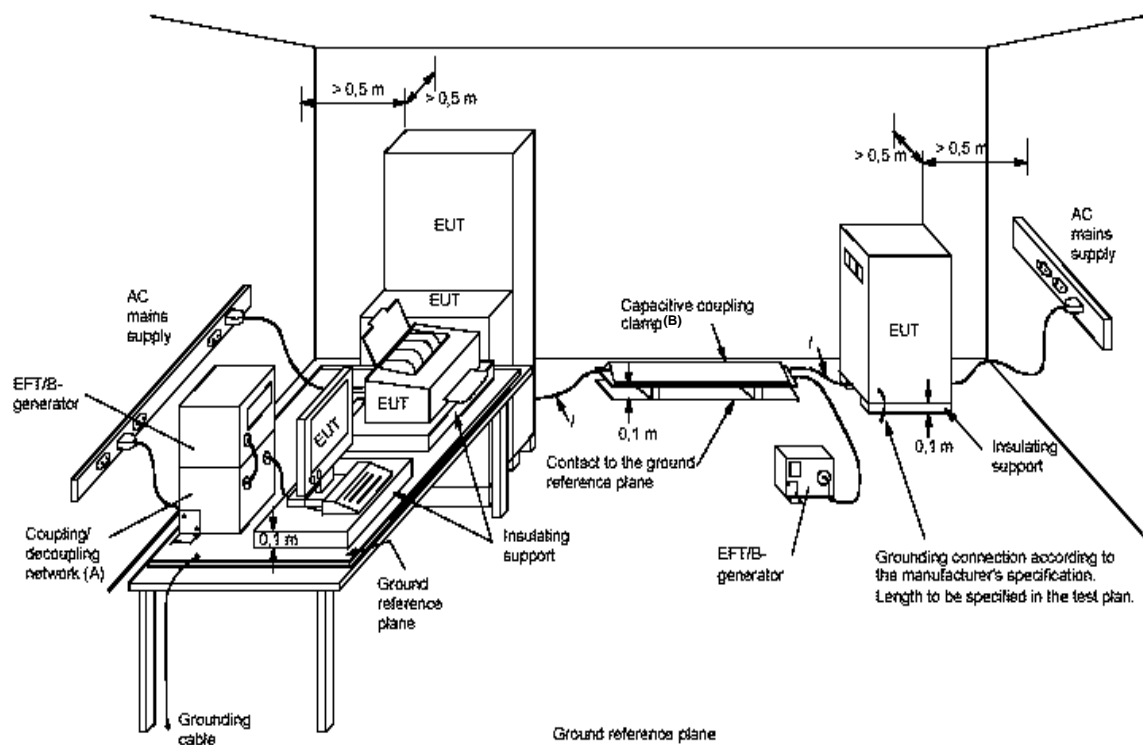

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

- /: length between clamp and the EUT to be tested (should be  $0.5 \pm 0.05$  m)
- (A): location for supply line coupling
- (B): location for signal lines coupling

### NOTE:

EUTs, whether stationary floor-mounted or table top, and equipment designed to be mounted in other configurations, shall be placed on a ground reference plane and shall be insulated from it by an insulating support  $0.1 \text{ m} \pm 0.01 \text{ m}$  thick. A minimum distance of 0.5 m was provided between the EUT and the walls of the laboratory or any other metallic structure.

### 5.6.6 TEST RESULTS

<b>TEST MODE</b>	Mode 1	<b>INPUT POWER (AC TO AC ADAPTER)</b>	AC 24V
<b>ENVIRONMENTAL CONDITIONS</b>	27deg. C, 70% RH	<b>TESTED BY</b>	Aga Lin

<b>TEST POINT</b>	<b>POLARITY</b>	<b>TEST LEVEL (kV)</b>	<b>OBSERVATION</b>	<b>PERFORMANCE CRITERION</b>
L1	+/-	1	Note(1)(2)	B
L2	+/-	1	Note(1)(2)	B
L1-L2	+/-	1	Note(1)(2)	B
Cat. 5 Line	+/-	0.5	Note(1)(2)	B
BNC cable	+/-	0.5	Note(1)(2)	B

**NOTE:** (1) There was flickered disturbance on the screen during the test, but self-recoverable after the test.  
 (2) There was disturbance from the speaker during the test, but self-recoverable after the test.

## 5.7 SURGE IMMUNITY TEST

### 5.7.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-5
<b>Wave-Shape:</b>	Combination Wave for power lines 1.2/50 us Open Circuit Voltage 8 /20 us Short Circuit Current 10/700 us Wave for signal lines 10/700 us Open Circuit Voltage
<b>Test Voltage:</b>	Power Line : 0.5 kV, 1 kV Signal Line : 0.5 kV, 1 kV
<b>Surge Input/Output:</b>	L1-L2
<b>Generator Source</b>	2 ohm between networks
<b>Impedance:</b>	12 ohm between network and ground
<b>Polarity:</b>	Positive/Negative
<b>Phase Angle:</b>	0° /90°/180°/270°
<b>Pulse Repetition Rate:</b>	1 time / 20 sec.
<b>Number of Tests:</b>	5 positive and 5 negative at selected points

### 5.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
NoiseKen Surge Generator	LSS-15AX-C3A	LSS1071126	Oct. 24, 2011	Oct. 23, 2012
Coupling Decoupling Network	CDN-UTP8	028	Jul. 18, 2012	Jul. 17, 2013
Surge Cable	WE-4	SU1Cab-001	NA	NA
Surge Adapter WONPRO	WA-9	SU1ADA-002	NA	NA

- NOTE:**
1. The test was performed in Surge Room.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: Aug. 9, 2012.

### 5.7.3 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT:

The surge is applied to the lines via the capacitive coupling. The coupling / decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


c. For test applied to unshielded symmetrically operated interconnection / telecommunication lines of EUT:

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

### 5.7.4 DEVIATION FROM TEST STANDARD

No deviation.

### 5.7.5 TEST SETUP

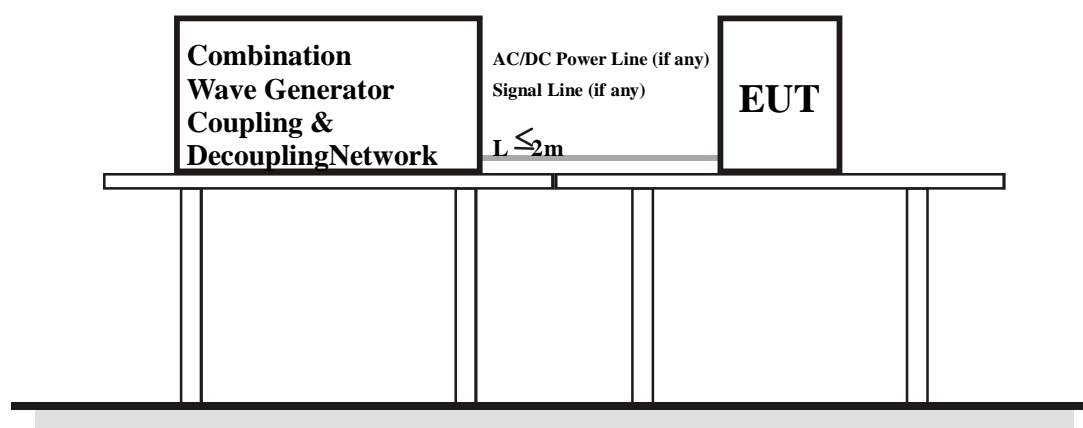

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 5.7.6 TEST RESULTS

<b>TEST MODE</b>	Mode 1	<b>INPUT POWER</b>	230Vac, 50 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 68% RH	<b>TESTED BY</b>	Josh Lin

<b>VOLTAGE (kV)</b>	<b>TEST POINT</b>	<b>POLARITY</b>	<b>OBSERVATION</b>	<b>PERFORMANCE CRITERION</b>
0.5, 1	L1-L2	+/-	Note(1)	A
0.5, 1	BNC cable	+/-	Note(2)	B
0.5, 1	Cat. 5 Line	+/-	Note(3)	B

- NOTE:** (1) There was no change compared with initial operation during the test.  
 (2) There was flickered disturbance on the monitor's screen during the test, but self-recoverable after the test.  
 (3) The transmission of data from LAN port was disconnected during the test, but self-recoverable after the test.



A D T

## 5.8 IMMUNITY TO CONDUCTED DISTURBANCES INDUCED BY RF FIELDS (CS)

### 5.8.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-6
<b>Frequency Range:</b>	0.15 MHz - 80 MHz
<b>Field Strength:</b>	3 V <sub>r.m.s.</sub>
<b>Modulation:</b>	1kHz Sine Wave, 80%, AM Modulation
<b>Frequency Step:</b>	1 % of fundamental
<b>Coupled Cable:</b>	Power Mains, Signal Cable
<b>Coupling Device:</b>	CDN-M2 (2 wires), CDN-T4, EM Clamp





A D T

## 5.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Signal Generator	SMY01	841104/033	Nov. 23, 2011	Nov. 22, 2012
Digital Sweep Function Generator	8120	984801	NA	NA
AR Power Amplifier	75A250AM1	312196	NA	NA
FCC Coupling Decoupling Network	FCC-801-M3-25A	48	Aug. 19, 2011	Aug. 18, 2012
FCC Coupling Decoupling Network	FCC-801-M3-25A	01022	Feb. 24, 2012	Feb. 23, 2013
FCC Coupling Decoupling Network	FCC-801-M2-16A	01047	Aug. 19, 2011	Aug. 18, 2012
FISCHER CUSTOM COMMUNICATIONS EM Injection Clamp	FCC-203I	50	NA	NA
FISCHER CUSTOM COMMUNICATIONS Current Injection Clamp	F-120-9A	361	NA	NA
EM TEST Coupling Decoupling Network	CDN M1/32A	306508	Feb. 24, 2012	Feb. 23, 2013
FCC Coupling Decoupling Network	FCC-801-T8	02038	Feb. 24, 2012	Feb. 23, 2013
FCC Coupling Decoupling Network	FCC-801-T4	02031	Feb. 24, 2012	Feb. 23, 2013
FCC Coupling Decoupling Network	FCC-801-T2	02021	Feb. 24, 2012	Feb. 23, 2013
R&S Power Sensor	NRV-Z5	837878/038	Nov. 15, 2011	Nov. 14, 2012
R&S Power Sensor	NRV-Z5	837878/039	Nov. 14, 2011	Nov. 13, 2012
R&S Power Meter	NRVD	837794/040	Nov. 15, 2011	Nov. 14, 2012
Software	ADT_CS_V7.4.2	NA	NA	NA

- NOTE:** 1. The test was performed in CS Room No. 1.  
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
3. Tested Date: Aug. 8, 2012.

### **5.8.3 TEST PROCEDURE**


The EUT shall be tested within its intended operating and climatic conditions.

- b. An artificial hand was placed on the hand-held accessory and connected to the ground reference plane.
- c. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.
- d. The frequency range is swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal is modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. Where the frequency is swept incrementally, the step size shall not exceed 1 % of the preceding frequency value.
- e. The dwell time of the amplitude modulated carrier at each frequency shall not be less than the time necessary for the EUT to be exercised and to respond, but shall in no case be less than 0,5 s. The sensitive frequencies (e.g. clock frequencies) shall be analyzed separately.
- f. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

### **5.8.4 DEVIATION FROM TEST STANDARD**

No deviation

## 5.8.5 TEST SETUP

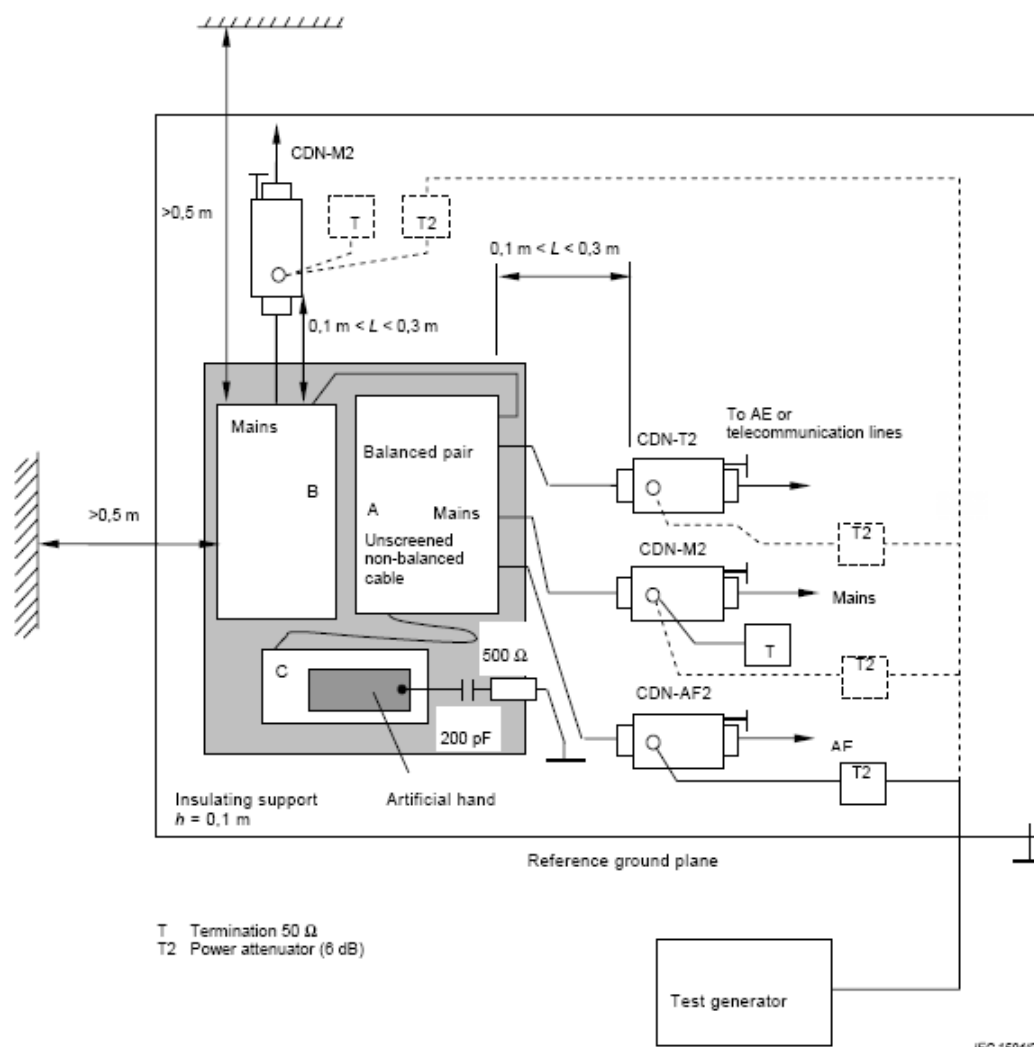

- Note:**
1. The EUT clearance from any metallic obstacles shall be at least 0,5 m.
  2. Interconnecting cables ( $\leq 1$  m) belonging to the EUT shall remain on the insulating support.
  3. The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

## 5.8.6 TEST RESULTS

<b>TEST MODE</b>	Mode 1	<b>INPUT POWER (AC TO AC ADAPTER)</b>	AC 24V
<b>ENVIRONMENTAL CONDITIONS</b>	27deg. C, 69% RH	<b>TESTED BY</b>	Aga Lin

<b>FREQUENCY (MHz)</b>	<b>FIELD STRENGTH (V<sub>r.m.s.</sub>)</b>	<b>CABLE</b>	<b>INJECTION METHOD</b>	<b>RETURN PATH</b>	<b>OBSER- VATION</b>	<b>PERFORMANCE CRITERION</b>
0.15 – 80	3	AC power line	CDN-M2	CDN-M3	Note	A
0.15 – 80	3	Cat. 5 Line	CDN-T4	CDN-M3	Note	A
0.15 – 80	3	BNC cable	EM Clamp	CDN-M3	Note	A

**NOTE:** There was no change compared with initial operation during the test.

## 5.9 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST

### 5.9.1 TEST SPECIFICATION

<b>Basic Standard:</b>	IEC 61000-4-8
<b>Frequency Range:</b>	50Hz
<b>Field Strength:</b>	1 A/m
<b>Observation Time:</b>	1 minute
<b>Inductance Coil:</b>	Rectangular type, 1mx1m

### 5.9.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HAEFELY Magnetic Field Tester	MAG 100.1	083794-06	NA	NA
COMBINOVA Magnetic Field Meter	MFM10	224	Apr. 12, 2012	Apr. 11, 2013

- NOTE:**
1. The test was performed in EMS Room No. 1.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: Aug. 8, 2012.


### 5.9.3 TEST PROCEDURE

- a. The equipment is configured and connected to satisfy its functional requirements.
- b. The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.
- c. The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

### 5.9.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.9.5 TEST SETUP

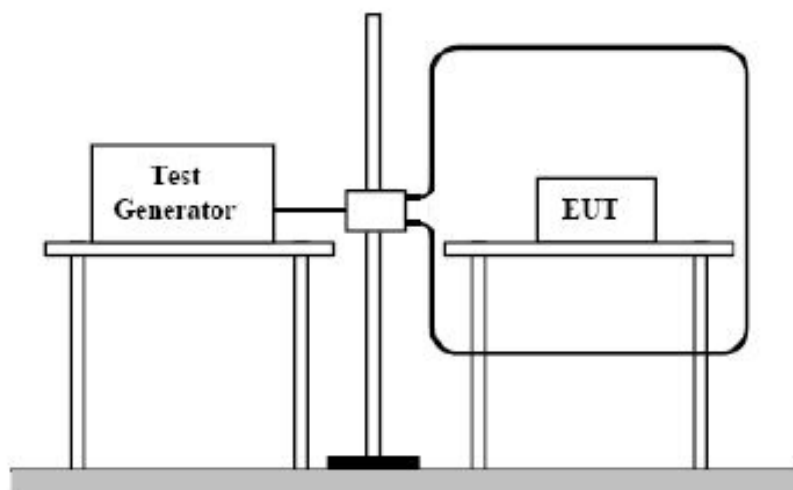

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**NOTE:**

**TABLETOP EQUIPMENT**

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

**FLOOR-STANDING EQUIPMENT**

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.



### 5.9.6 TEST RESULTS


<b>TEST MODE</b>	Mode 1	<b>INPUT POWER (AC TO AC ADAPTER)</b>	AC 24V
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 68% RH	<b>TESTED BY</b>	Aga Lin

<b>DIRECTION</b>	<b>Field Strength (A/m)</b>	<b>OBSERVATION</b>	<b>PERFORMANCE CRITERION</b>
X - Axis	1	Note	A
Y - Axis	1	Note	A
Z - Axis	1	Note	A

**NOTE:** There was no change compared with the initial operation during the test.

## 6 PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST

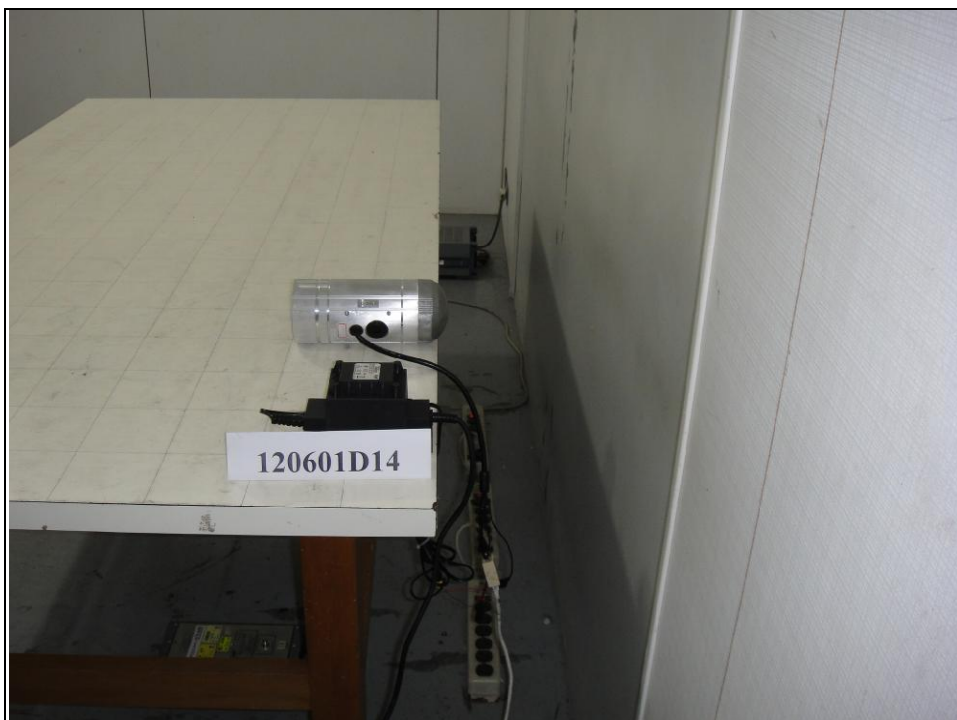



## TELECOMMUNICATION PORT - RJ45 OF CONDUCTED EMISSION TEST



# RADIATED EMISSION TEST <Frequency Range 30MHz ~ 1GHz>



### RADIATED EMISSION TEST <Frequency Range above 1GHz>





## ESD TEST






### ESD TEST POINT

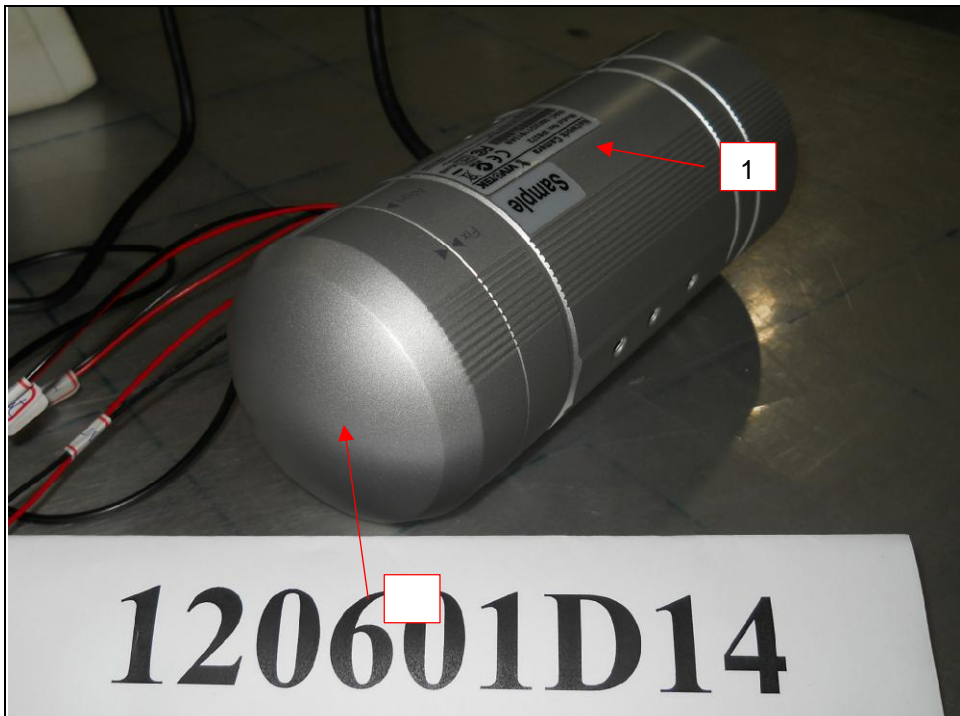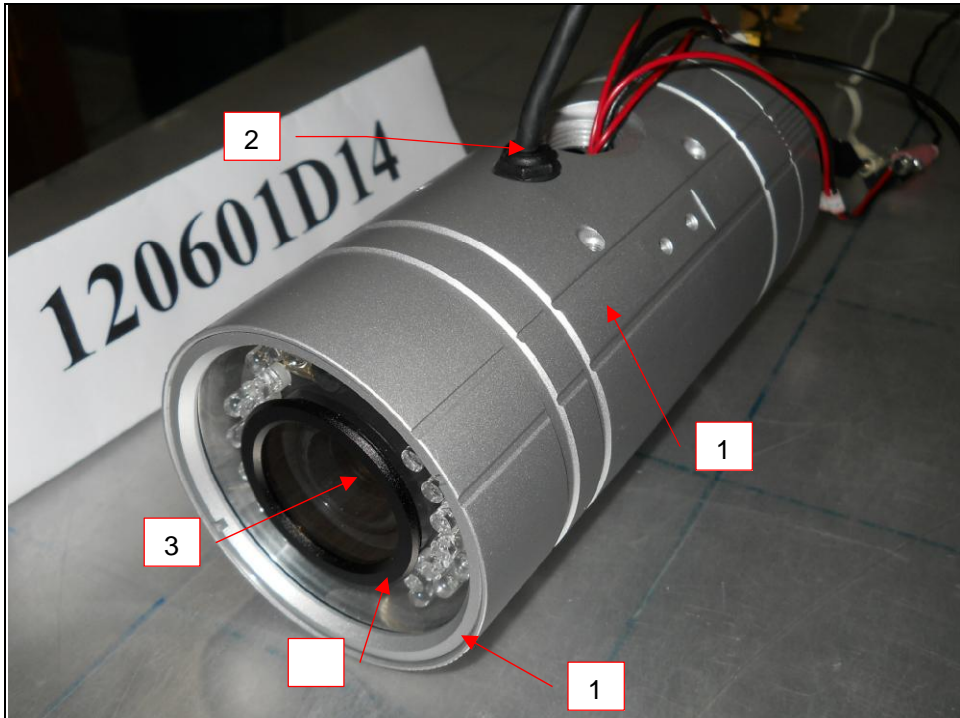


ESD TEST POINT


120601D14

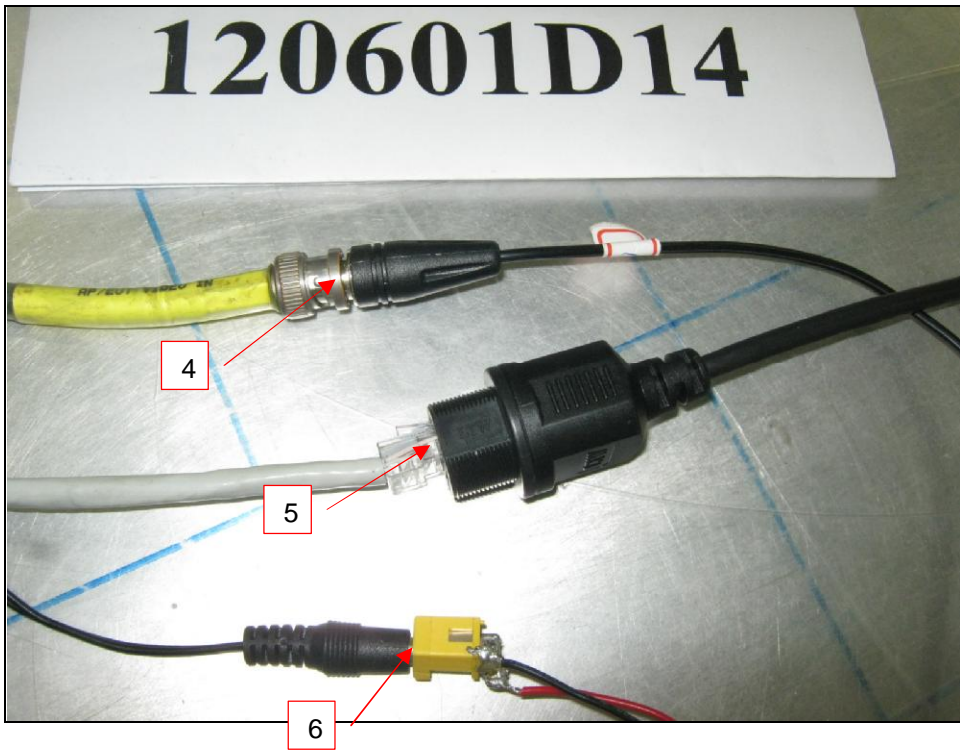

# RS TEST

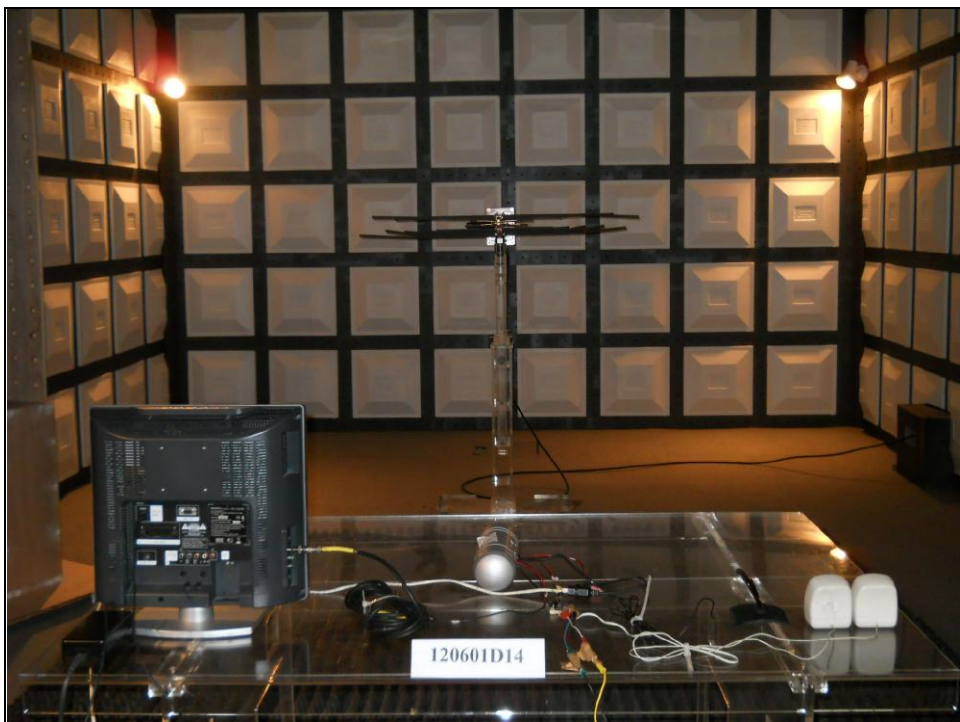

### EFT TEST

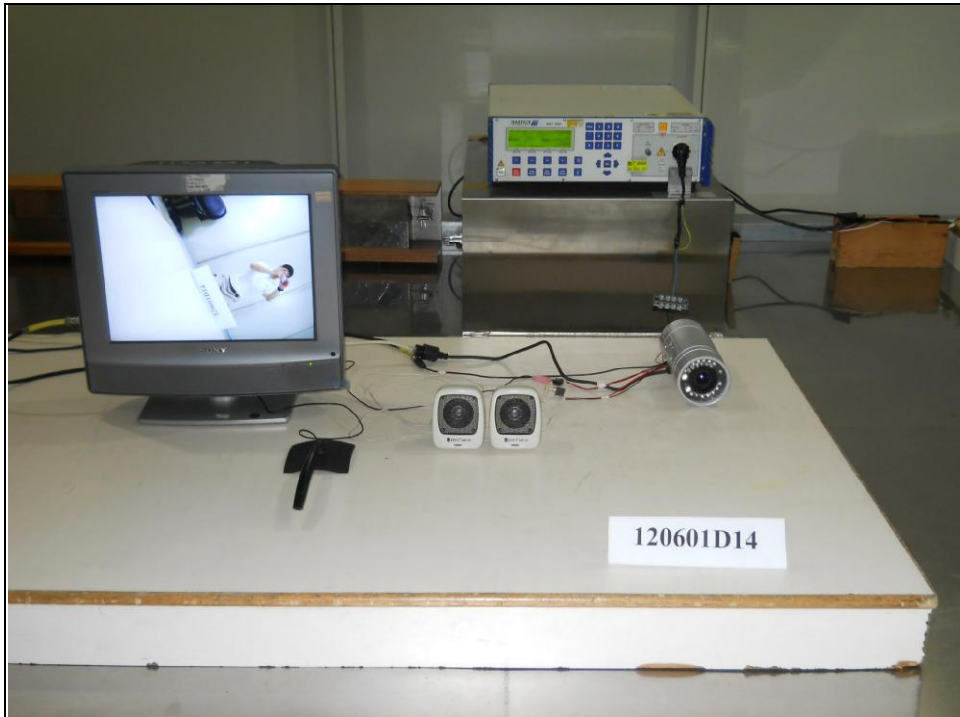


### EFT TEST –Cat. 5 Line





### EFT TEST – BNC cable

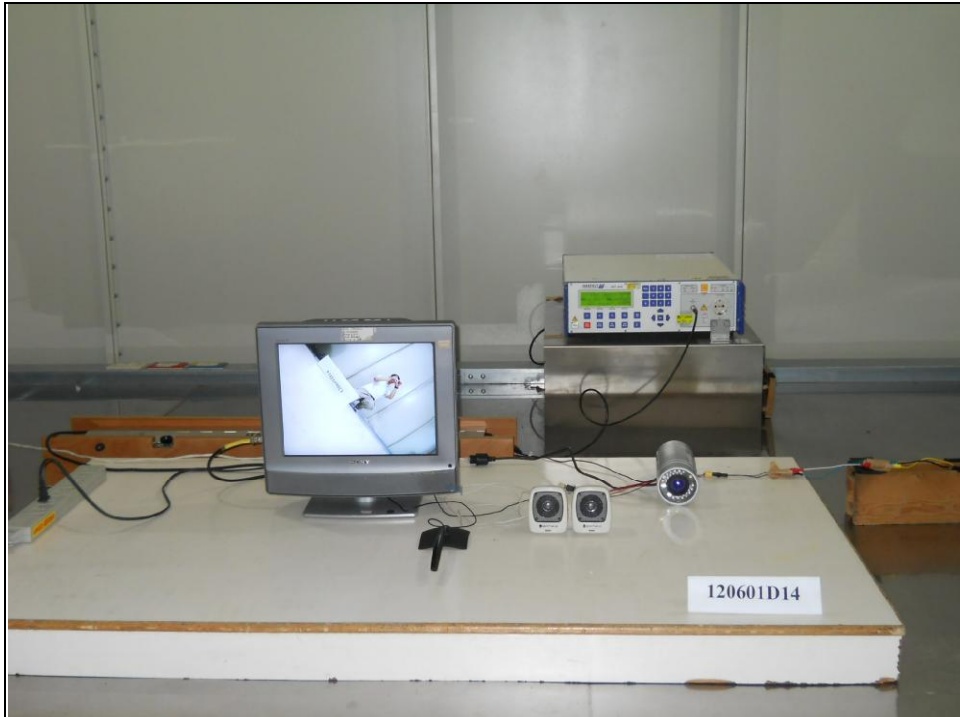

### SURGE TEST




### SURGE TEST –Cat. 5 Line




### SURGE TEST- BNC cable




### CONDUCTED SUSCEPTIBILITY TEST

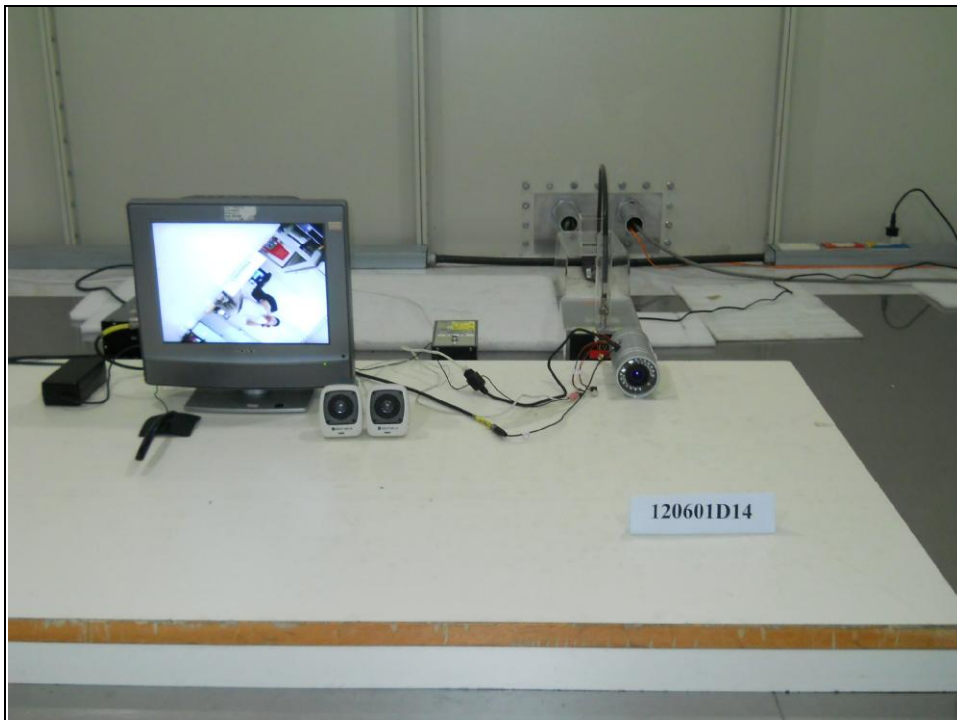


### CONDUCTED SUSCEPTIBILITY TEST –Cat. 5 Line

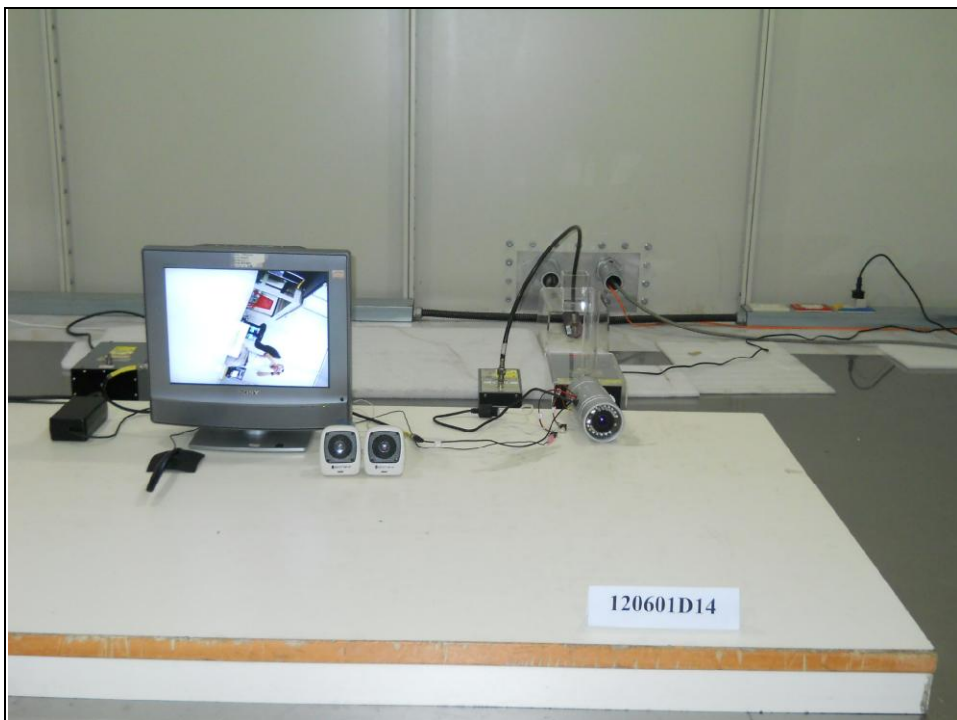

## CONDUCTED SUSCEPTIBILITY TEST– BNC cable

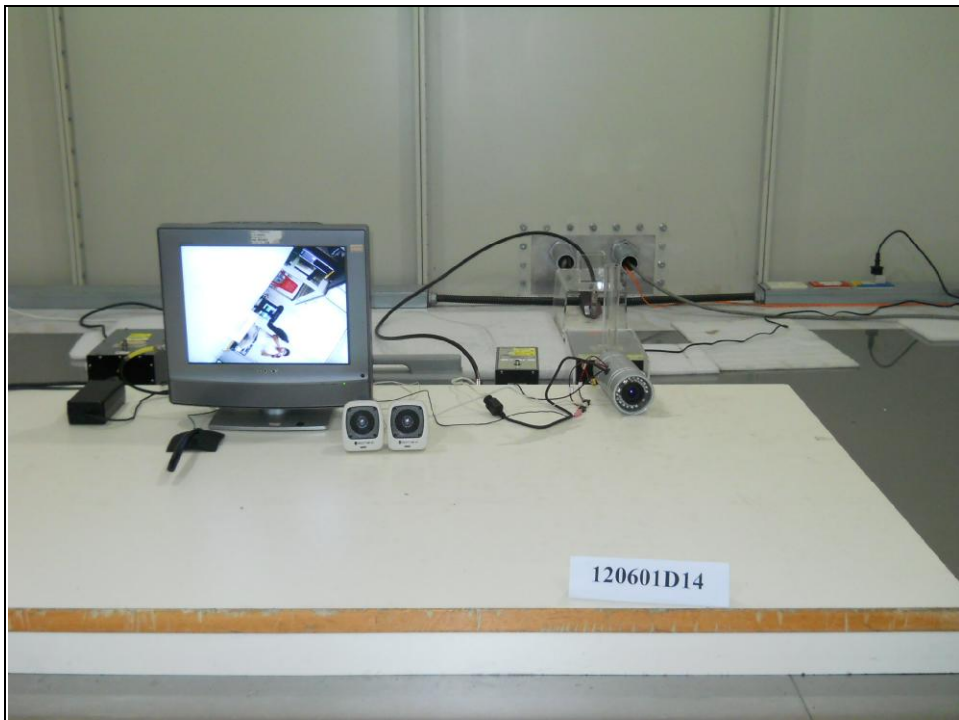

## POWER-FREQUENCY MAGNETIC FIELDS TEST

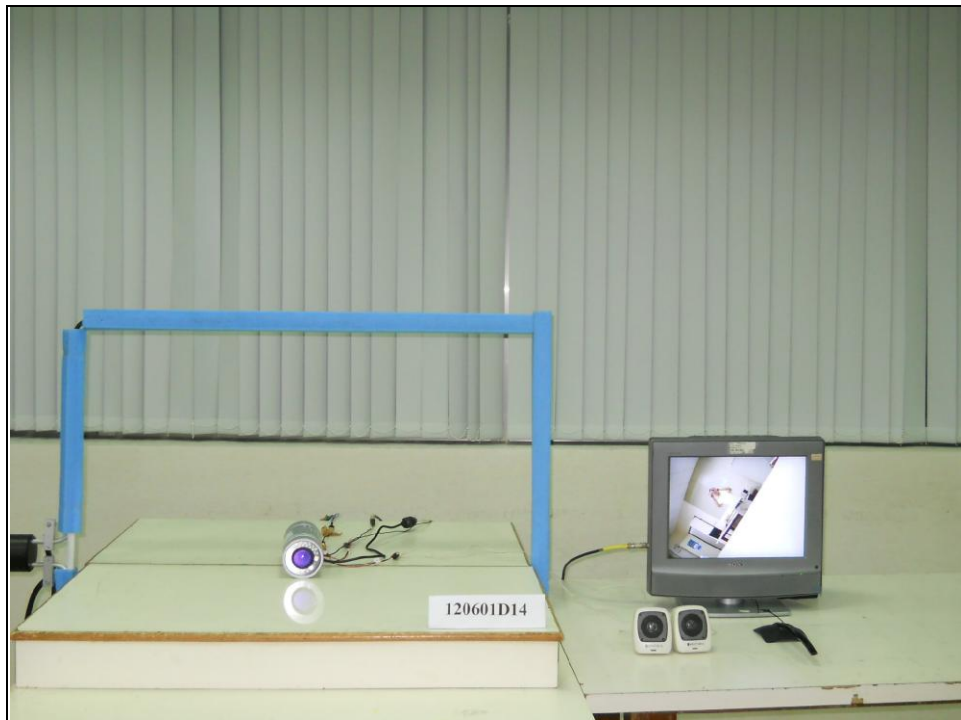



A D T

## 7 APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/EN 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.

---END---